


Compartment wall - twrxo07b-03

compartment wall, timber frame construction, without dry lining, double-layer, other surface

Performance rating

Fire protection performance	REI	90
apply to each individual load-bearing wall; the whole wall: EI90; maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 19,0 kN/m Classified by HFA		
Thermal performance	U Diffusion	0.17 W/(m ² K) suitable
Calculated by HFA		
Acoustic performance	R_w (C;C _{tr}) $L_{n,w}$ (C _i)	60(-3;-10) dB
Assessed by MA39		
Mass per unit area	m	122.50 kg/m ²
Calculation based on gypsum plaster board type DF		

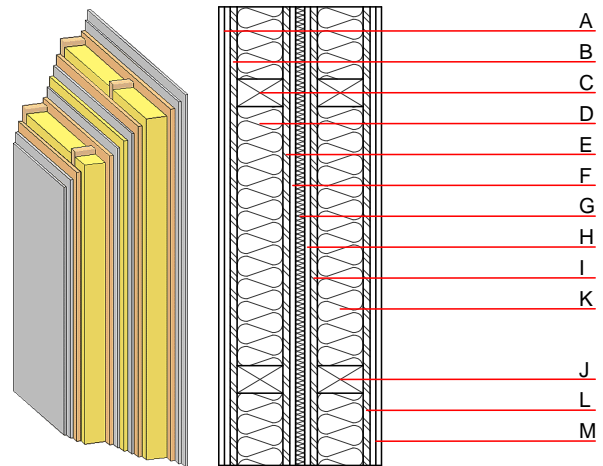

Note: e=625

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
A	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2
B	15.0	OSB	0.130	200	600	1.700	D
C	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
D	100.0	cellulose fibre [0,040; R=55]	0.040	1 - 2	55	2.000	B
E	15.0	OSB	0.130	200	600	1.700	D
F	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
F	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
G	20.0	mineral wool [040; ≥ 16 ; <1000°C]	0.040	1	16	1.030	A1
H	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
H	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
I	15.0	OSB	0.130	200	600	1.700	D
J	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
K	100.0	cellulose fibre [0,040; R=55]	0.040	1 - 2	55	2.000	B
L	15.0	OSB	0.130	200	600	1.700	D
M	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
M	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

$O13_{kon}$ 33.7

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3	-109.093	0.195	0.083	4,36E-6	0.015	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	168.991	1578.256	1747.248	723.946	53.816	777.762