

### Internal wall - iwrxo06b-04


internal wall, timber frame construction, without dry lining, other surface

#### Performance rating

**Fire protection performance** REI 90  
 maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 19,0 \text{ kN/m}$   
 Classified by MA39

**Acoustic performance**  $R_w (C; C_{tr})$   
 $L_{n,w} (C_i)$

**Mass per unit area** m 68.60 kg/m<sup>2</sup>  
 Calculation based on GF

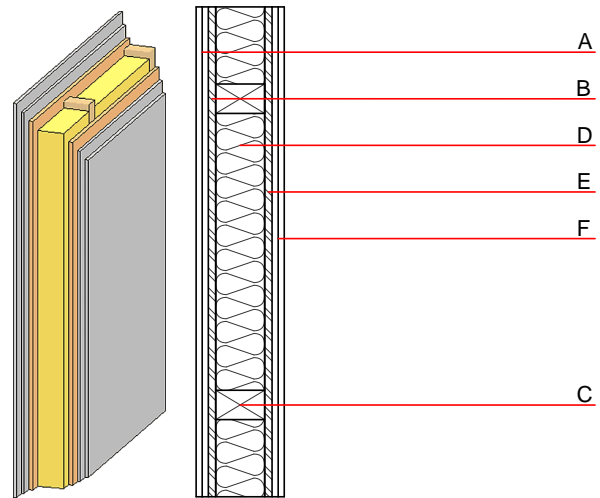

**Note:** The fire resistance is only valid when wall is used as partition with only one side exposed to fire.  
 (C=60/100); e=625

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
A	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2
B	15.0	OSB	0.130	200	600	1.700	D
C	100.0	construction timber (60/100 or 60/160; e=*)	0.120	50	450	1.600	D
D	100.0	cellulose fibre [0,040; R=55]	0.040	1 - 2	55	2.000	B
E	15.0	OSB	0.130	200	600	1.700	D
F	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
F	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2

#### Sustainability rating (per m<sup>2</sup>)

##### Database ecoinvent

**O13<sub>kon</sub>** 18.9  
 Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3	-24.297	0.082	0.034	2,17E-6	0.006	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	77.026	449.853	526.879	334.201	28.650	362.851