

## External wall - awmhh01a-03

external wall, solid wood construction, ventilated, with dry lining, with cladding, other surface

### Performance rating

<b>Fire protection performance</b>	<b>REI from inside</b>	90
	<b>REI from outside</b>	60
Maximum ceiling height = 3 m; maximum load $E_{d,fi} = 35,0 \text{ kN/lfm}$ Classified by HFA		

#### Germany

REI 60 (from inside/from outside); Attention: REI 90 (from inside) possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board  
Load  $E_{d,fi}$  according to the German certification document  
Corresponding proof: manufacturer specific

<b>Thermal performance</b>	<b>U</b>	0.12 W/(m <sup>2</sup> K)
	<b>Diffusion</b>	suitable

Calculated by TUM


<b>Acoustic performance</b>	<b>R<sub>w</sub> (C;C<sub>tr</sub>)</b>	56(-2;-7) dB
	<b>L<sub>n,w</sub> (C<sub>i</sub>)</b>	

Assessed by HFA

Assessed by Müller-BBM

<b>Mass per unit area</b>	<b>m</b>	95.50 kg/m <sup>2</sup>
---------------------------	----------	-------------------------

Calculation based on gypsum plaster board type DF

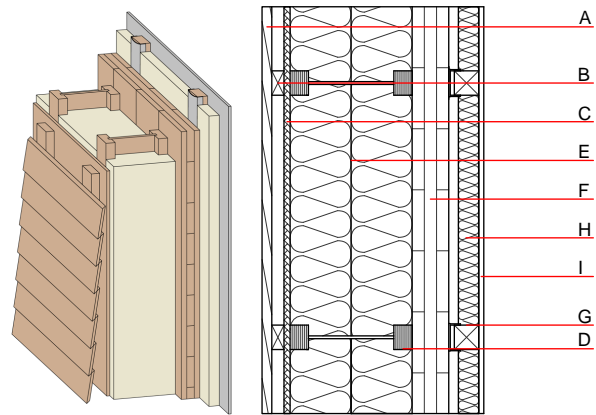

Note: Attention: REI 90 (from inside) in Germany possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens offset (30/60) - ventilation	0.120	50	450	1.600	D
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	300.0	Light composite wood-based beams (I-beams) with solid wood flanges (60/45) and hard board intermediate web ( $\geq 6,7$ ) e=625	0.400	20 - 30	800	1.700	D
E	300.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1
F	100.0	cross laminated timber (at least 3-layers, top layer at least 30mm)	0.130	50	500	1.600	D
G	70.0	spruce wood battens 60/60 on resilient clips, e=625	0.120	50	450	1.600	D
H	50.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

<b>O13<sub>Kon</sub></b>	39.0
--------------------------	------

Calculated by HFA

#### Database GaBi (ÖKOBAUDAT)

<b>Built-in renewable materials</b>	kg	82.210
<b>Biogenic carbon in kg CO<sub>2</sub>-e.</b>	kg CO <sub>2</sub>	117.790
<b>Energy use of Primary Energy</b>	MJ	1196.880
<b>Share of renewable PE</b>	%	39.92

Calculated by TUM

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.213	0.093	3,65E-6	0.055	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	111.274	1224.177	1335.451	703.347	36.238	739.585

### Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.200	0.036	4,51E-6	0.032	
C1 - C4		0.004	0.004	1,96E-7	0.001	
A1 - C4		0.206	0.040	4,71E-6	0.032	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	476.396	1383.888	1856.955	691.437	47.947	738.880
C1 - C4	0.990	-1377.285	-1376.295	20.467	-22.975	-2.510
A1 - C4	477.779	6.862	481.312	719.097	25.024	743.610