

## External wall - awmohi02a-06

external wall, solid wood construction, ventilated, with dry lining, with cladding, other surface

### Performance rating

**Fire protection performance** REI from inside 90  
REI from outside 60  
maximum ceiling height = 3 m; maximum load  $E_{d,fi}$  = 35 kN/m  
Classified by HFA

#### Germany

REI 60 (from inside/from outside); Attention: REI 90 (from inside) possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board  
Load  $E_{d,fi}$  according to the German certification document  
Corresponding proof: manufacturer-specific

**Thermal performance** U 0.15 W/(m<sup>2</sup>K)  
Diffusion suitable


Calculated by TUM

**Acoustic performance**  $R_w$  (C;C<sub>tr</sub>) 53(-2;-8) dB  
 $L_{n,w}$  (C<sub>i</sub>)

Assessed by Müller-BBM

**Mass per unit area** m 107.20 kg/m<sup>2</sup>

Calculation based on gypsum plaster board type DF

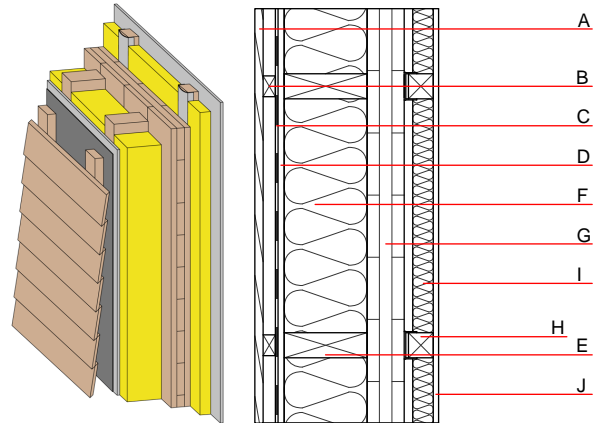

Note: Attention: REI 90 (from inside) in Germany possible with 2x12,5mm GKF/GF

Cross laminated timber: Var. 04-06: at least 3-layers, top layer at least 30mm; var. 03: d ≥ 85mm; at least 5-layers, top layer at least 17mm

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C		vapour-permeable membrane sd ≤ 0,3m					
D	15.0	gypsum fibre board	0.320	21	1000	1.100	A2
E	200.0	construction timber (60/200; e=625)	0.120	50	450	1.600	D
F	200.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
G	100.0	cross laminated timber	0.130	50	500	1.600	D
H	70.0	battens (60/60) on resilient clips, e=660	0.120	50	450	1.600	
I	50.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1
J	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
J	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

O13<sub>Kon</sub> 35.9

Calculated by HFA

#### Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	82.460
Biogenic carbon in kg CO <sub>2</sub> -e.	kg CO <sub>2</sub>	119.170
Energy use of Primary Energy	MJ	1287.840
Share of renewable PE	%	39.83

Calculated by TUM

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.196	0.086	3,78E-6	0.056	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	141.785	1273.535	1415.320	696.090	37.588	733.679

### Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.156	0.032	3,17E-6	0.031	
C1 - C4		0.004	0.001	2,26E-7	0.000	
A1 - C4		0.163	0.034	3,41E-6	0.032	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	510.150	1704.220	2212.233	729.109	70.277	798.930
C1 - C4	1.930	-1693.680	-1691.749	33.711	-32.077	1.630
A1 - C4	512.939	11.058	521.861	774.902	38.315	812.770