


## External wall - awmoho01a-01

external wall, solid wood construction, not ventilated, without dry lining, with cladding, other surface

### Performance rating

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	30
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 35,0 \text{ kN/m}$ Classified by HFA		
<b>Thermal performance</b>	U	0.22 W/(m <sup>2</sup> K)
	Diffusion	suitable
Calculated by HFA		
<b>Acoustic performance</b>	$R_w (C; C_{tr})$	51 (-3; 9) dB
	$L_{n,w} (C_i)$	
Assessed by TU-GRAZ		
<b>Mass per unit area</b>	m	72.40 kg/m <sup>2</sup>

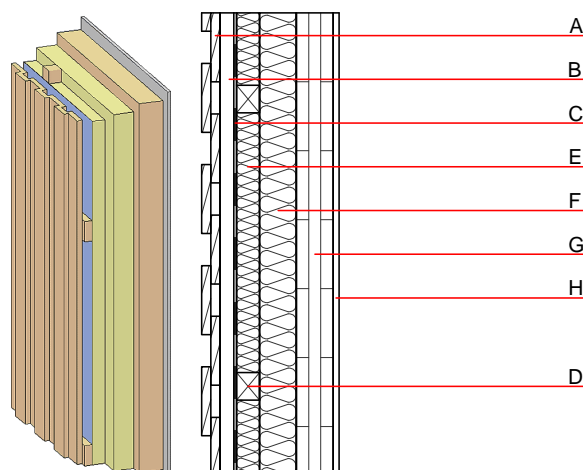

Note: When using cross laminated timber:

Variation 02-03:  $d \geq 94,0$ ; at least 3-layers, top layer at least 30mm; variation 00-01:  $d \geq 78,0$ ; at least 3-layers, top layer at least 25mm

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	20.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens (30/60)	0.120	50	450	1.600	D
C		vapour-permeable membrane $sd \leq 0,3\text{m}$					
D	80.0	spruce wood battens (40/50 or 80/60; e=625)	0.120	50	450	1.600	D
E	80.0	mineral wool [040; $\geq 70$ ; $\geq 1000^\circ\text{C}$ ]	0.040	1	70	1.030	A1
F	80.0	mineral wool [040; $\geq 70$ ; $\geq 1000^\circ\text{C}$ ]	0.040	1	70	1.030	A1
G	80.0	solid glued wood (e.g. cross laminated timber)	0.130	50	500	1.600	D
H	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 50.4

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.258	0.087	2,97E-6	0.098	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	90.684	797.085	887.769	650.418	19.804	670.221