

External wall - awmopi01a-11

external wall, solid wood construction, not ventilated, with dry lining, with rendering, other surface

Performance rating

Fire protection performance	REI from inside	90
	REI from outside	90

maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 35,0 kN/m
Classified by HFA

Germany

REI60 (from inside/from outside); Attention: REI 90 (from inside) in Germany possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: manufacturer-specific

Thermal performance	U	0.19 W/(m ² K)
	Diffusion	suitable


Calculated by TUM

Acoustic performance	R_w (C;C _{tr})	50(-3;-9) dB
	$L_{n,w}$ (C _i)	

Assessed by Müller-BBM

Mass per unit area	m	97.90 kg/m ²
--------------------	---	-------------------------

Calculation based on gypsum plaster board type DF

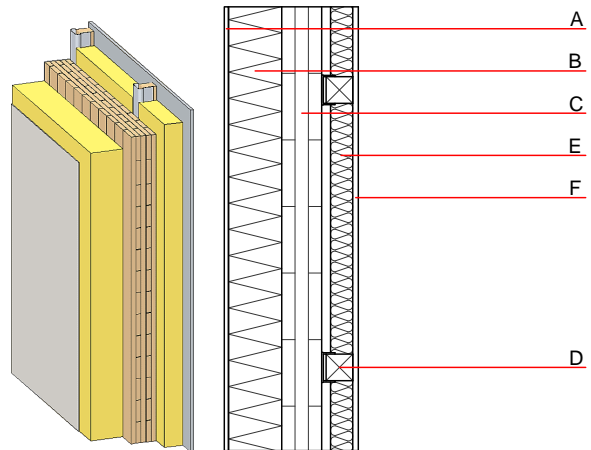

Note: Attention: REI90 (from inside) in Germany possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire	
			λ	μ min – max	ρ	c	EN	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1	
B	140.0	wood-fibre insulation board [0,045; R=160] ETICS insulation panel	0.045	5 - 7	160	2.100	E	
C	100.0	cross laminated timber	0.130	50	500	1.600	D	
D	70.0	spruce wood battens (60/60) mounted on resilient clips; e=660	0.120	50	450	1.600	D	
E	50.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1	
F	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2	
F	12.5	gypsum fibre board	0.320	21	1000	1.100	A2	

Sustainability rating (per m²)

Database ecoinvent

OI3 _{Kon}	40.4
--------------------	------

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	84.030
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	120.820
Energy use of Primary Energy	MJ	994.340
Share of renewable PE	%	38.70

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.196	0.085	3,77E-6	0.048	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	67.959	983.735	1051.694	686.090	41.572	727.662

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.124	0.025	2,70E-6	0.023	
C1 - C4		0.003	0.001	1,49E-7	0.000	
A1 - C4		0.130	0.027	2,85E-6	0.024	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	382.980	1238.733	1619.503	580.459	36.192	616.110
C1 - C4	1.438	-1233.289	-1231.687	23.561	-24.762	1.010
A1 - C4	384.799	5.703	388.661	609.544	11.482	626.060