

## External wall - awmopi01a-02

external wall, solid wood construction, not ventilated, with dry lining, with rendering, other surface

### Performance rating

<b>Fire protection performance</b>	<b>REI from inside</b>	90
	<b>REI from outside</b>	90

maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 35,0 \text{ kN/m}$   
 Classified by HFA

#### Germany

REI60 (from inside;/from outside); Attention: REI 90 (from inside) in Germany possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board

Load  $E_{d,fi}$  according to the German certification document

Corresponding proof: manufacturer-specific

<b>Thermal performance</b>	<b>U</b>	0.18 $\text{W}/(\text{m}^2\text{K})$
	<b>Diffusion</b>	suitable


Calculated by HFA  
 Calculated by TUM

<b>Acoustic performance</b>	<b><math>R_w</math> (<math>C_c, C_{tr}</math>)</b>	50(-3;-9) dB
	<b><math>L_{n,w}</math> (<math>C_i</math>)</b>	

$R_w=48\text{dB}$  if a lightweight ETICS insulation panel ( $\rho$  approx.  $90\text{kg}/\text{m}^3$ ) is applied.  
 Assessed by Müller-BBM

<b>Mass per unit area</b>	<b>m</b>	97.40 $\text{kg}/\text{m}^2$
---------------------------	----------	------------------------------

Calculation based on gypsum plaster board type DF

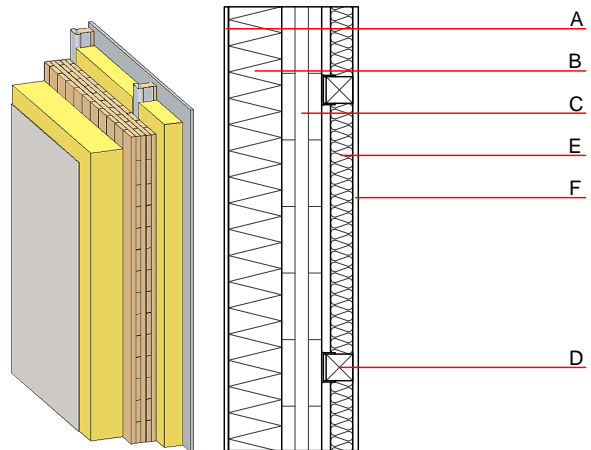

Note: Attention: REI90 (from inside) in Germany possible with 2x12,5mm gypsum plaster board type DF/gypsum fibre board

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1
B	140.0	mineral wool MW-PT [041; 155] ETICS insulation panel	0.041	1	155	1.030	A1
C	100.0	cross laminated timber	0.130	50	500	1.600	D
D	70.0	spruce wood battens (60/60) mounted on resilient clips; e=660	0.120	50	450	1.600	D
E	50.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
F	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
F	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per $\text{m}^2$ )

#### Database ecoinvent

$OI3_{kon}$  82.3

Calculated by HFA

#### Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	51.830
Biogenic carbon in $\text{kg CO}_2\text{-e}$ .	$\text{kg CO}_2$	74.710
Energy use of Primary Energy	MJ	864.810
Share of renewable PE	%	28.41

Calculated by TUM

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.394	0.127	4,24E-6	0.147	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	56.248	731.169	787.416	936.905	17.714	954.619

### Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.229	0.036	3,30E-6	0.022	
C1 - C4		0.005	0.007	1,53E-7	0.001	
A1 - C4		0.237	0.043	3,46E-6	0.022	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	244.511	888.138	1130.439	594.367	37.891	631.720
C1 - C4	0.803	-879.492	-878.525	18.411	0.000	20.620
A1 - C4	245.701	8.905	252.764	619.109	37.943	662.090