

External wall - awrhh04a-15

external wall, timber frame construction, ventilated, with dry lining, with cladding, other surface

Performance rating

Fire protection performance REI from inside 60
REI from outside 30
maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 19,2 kN/m
Classified by HFA
Classified by HFA

Germany

F60 (from inside)/F30 (from outside)
Load $E_{d,fi}$ according to the German certification document
Corresponding proof: manufacturer-specific

Thermal performance U 0.18 W/(m²K)
Diffusion suitable


Calculated by TUM

Acoustic performance R_w (C;C_{tr}) 51(-3;-10) dB
 $L_{n,w}$ (C_i)

Assessed by Müller-BBM

Mass per unit area m 64.40 kg/m²

Calculation based on gypsum plaster board type DF

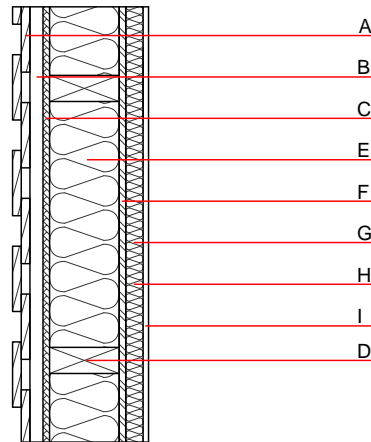

Note: dry lining ≥ 40 mm

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens offset (30/50; 30/80) - ventilation	0.120	50	450	1.600	D
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	200.0	construction timber (60/..; e=625)	0.120	50	450	1.600	D
E	200.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
F	15.0	OSB	0.130	200	600	1.700	D
G	40.0	spruce wood cross battens (a=400) ≥ 40mm	0.120	50	450	1.600	D
H	40.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

O13_{Kon} 19.4

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 59.430
Biogenic carbon in kg CO₂-e. kg CO₂ 86.080
Energy use of Primary Energy MJ 1192.180
Share of renewable PE % 38.34

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.113	0.049	1,94E-6	0.025	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	141.023	913.031	1054.054	401.932	45.530	447.462

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.134	0.029	1,64E-6	0.038	
C1 - C4		0.002	0.000	1,06E-7	0.000	
A1 - C4		0.138	0.030	1,75E-6	0.038	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	454.503	1377.220	1831.729	702.255	63.360	765.710
C1 - C4	2.204	-1372.966	-1370.762	27.612	-62.418	-34.810
A1 - C4	457.086	4.513	461.605	735.097	0.994	736.180