

External wall - awrhh04a-17

external wall, timber frame construction, ventilated, with dry lining, with cladding, other surface

Performance rating

Fire protection performance REI from inside 60
 REI from outside 30
 maximum ceiling height = 3 m; maximum load $E_{d,fi} = 19,2 \text{ kN/m}$
 Classified by HFA
 Classified by HFA

Germany

F60 (from inside)/F30 (from outside)
 Load $E_{d,fi}$ according to the German certification document
 Corresponding proof: manufacturer-specific

Thermal performance U 0.15 $\text{W}/(\text{m}^2\text{K})$
 Diffusion suitable


Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 52(-3; 10) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 69.00 kg/m^2

Calculation based on gypsum plaster board type DF

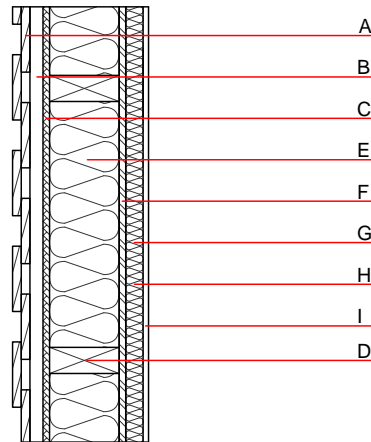

Note: dry lining $\geq 40 \text{ mm}$

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min - max}$	ρ	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens offset (30/50; 30/80) - ventilation	0.120	50	450	1.600	D
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	240.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
E	240.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
F	15.0	OSB	0.130	200	600	1.700	D
G	40.0	spruce wood cross battens (a=400) $\geq 40\text{mm}$	0.120	50	450	1.600	D
H	40.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m^2)

Database ecoinvent

$O13_{kon}$ 18.7

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 65.990
Biogenic carbon in $\text{kg CO}_2\text{-e}$. kg CO_2 92.410
Energy use of Primary Energy MJ 599.370
Share of renewable PE % 35.89

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.124	0.052	1,84E-6	0.024	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	141.276	909.045	1050.321	359.654	28.891	388.545

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.083	0.016	1,58E-6	0.024	
C1 - C4		0.007	0.010	1,40E-7	0.001	
A1 - C4		0.091	0.026	1,73E-6	0.025	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	213.874	1045.447	1259.540	361.879	22.382	384.370
C1 - C4	0.872	-819.850	-818.978	17.134	-21.440	-4.310
A1 - C4	215.126	225.856	441.200	384.243	0.994	385.350