

## External wall - awrhh07a-07

external wall, timber frame construction, ventilated, with dry lining, with cladding, other surface

### Performance rating

**Fire protection performance**  
REI from inside 60  
REI from outside 30  
maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 19,2 \text{ kN/m}$   
Classified by HFA

**Thermal performance**  
U 0.17 W/(m<sup>2</sup>K)  
Diffusion suitable


Calculated by HFA

**Acoustic performance**  
 $R_w (C; C_{tr})$  51 (-3; -10) dB  
 $L_{n,w} (C_i)$

Battens for the ventilation space screwed onto the structural timber together with vertical battens for the dry lining screwed directly onto the ledger beams will result in  $R_w(C; C_{tr})=44(-1;-5) \text{ dB}$   
Assessed by MA39

**Mass per unit area** m 46.50 kg/m<sup>2</sup>

Calculation based on GF

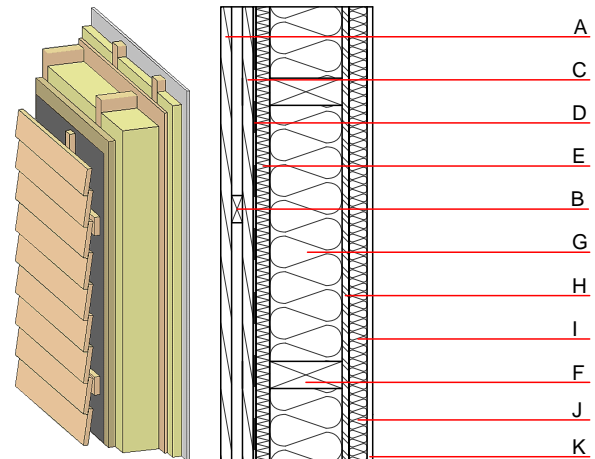

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	24.0	spruce wood battens - ventilation	0.120	50	450	1.600	D
C	24.0	spruce wood cross battens	0.120	50	450	1.600	D
D		wind barrier			1000		
E	60.0	wood-fibre insulation board [045; 140]	0.045	2 - 5	140	2.100	E
F	160.0	construction timber (60/-; e=*)	0.120	50	450	1.600	D
G	160.0	mineral wool [035; 50; <1000°C]	0.035	1	50	1.030	A1
H	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
I	40.0	spruce wood cross battens (a=400) or battens offset	0.120	50	450	1.600	D
J	40.0	mineral wool [035; 50; <1000°C]	0.035	1	50	1.030	A1
K	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
K	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 47.7

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.215	0.095	3,76E-6	0.011	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	102.724	642.349	745.074	675.655	25.028	700.683