

## External wall - awrhh07a-09

external wall, timber frame construction, ventilated, with dry lining, with cladding, other surface

### Performance rating

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	30

maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 19,2 \text{ kN/m}$   
 Classified by HFA

<b>Thermal performance</b>	U	0.19 $\text{W}/(\text{m}^2\text{K})$
	Diffusion	suitable


Calculated by HFA

<b>Acoustic performance</b>	$R_w (C;C_{tr})$	50(-3;-10) dB
	$L_{n,w} (C_i)$	

Battens for the ventilation space screwed onto the structural timber together with vertical battens for the dry lining screwed directly onto the ledger beams will result in  $R_w(C;Ctr)=43(-1;-5)$  dB  
 Assessed by MA39

<b>Mass per unit area</b>	m	47.40 $\text{kg}/\text{m}^2$
---------------------------	---	------------------------------

Calculation based on CF

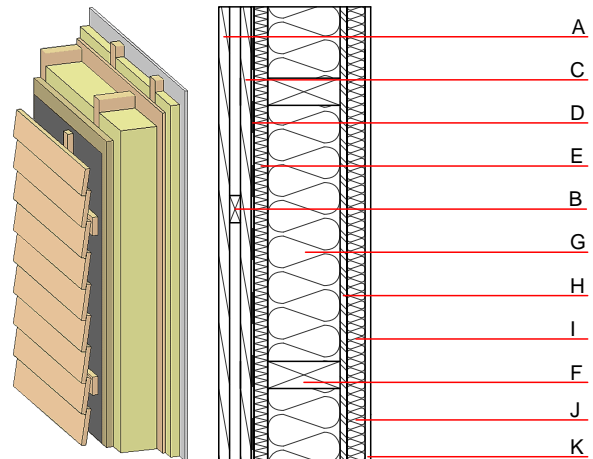

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	24.0	spruce wood battens - ventilation	0.120	50	450	1.600	D
C	24.0	spruce wood cross battens	0.120	50	450	1.600	D
D		wind barrier				1000	
E	60.0	wood-fibre insulation board [045; 140]	0.045	2 - 5	140	2.100	E
F	160.0	construction timber (60/..; e=*)	0.120	50	450	1.600	D
G	160.0	cellulose fibre [040; E]	0.040	1 - 2	55	2.000	E
H	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
I	40.0	spruce wood cross battens (a=400) or battens offset)	0.120	50	450	1.600	D
J	40.0	cellulose fibre [040; E]	0.040	1 - 2	55	2.000	E
K	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
K	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per $\text{m}^2$ )

#### Database ecoinvent

<b>O13<sub>kon</sub></b>	17.4
--------------------------	------

Calculated by HFA

**Details of sustainability rating**

Databaseecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.111	0.047	1,85E-6	0.007	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	91.935	742.510	834.445	331.854	25.028	356.882