

## External wall - awrhh09a-05

external wall, timber frame construction, ventilated, with dry lining, with cladding, wooden surface

### Performance rating

**Fire protection performance** REI from inside 30  
 REI from outside 30  
 maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32 \text{ kN/m}$   
 Classified by HFA


**Thermal performance** U 0.17  $\text{W}/(\text{m}^2\text{K})$   
 Diffusion suitable

Calculated by HFA

**Acoustic performance**  $R_w (C;C_{tr})$  46(-2;-7) dB  
 $L_{n,w} (C_i)$

with closed wooden facade  $R_w$  von 49 (-3; -10)  
 Assessed by TGM

**Mass per unit area** m 62.70  $\text{kg}/\text{m}^2$

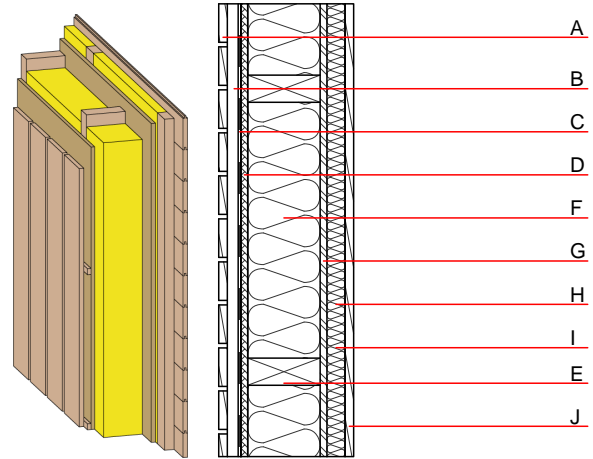

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	19.0	larch wood external wall cladding (open) vertical	0.155	150	600	1.600	D
B	30.0	larch wood - cross battens (30/50; 30/80) - ventilation	0.155	150	600	1.600	D
C		wind barrier			1000		
D	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
E	200.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
F	200.0	Wood fibre insulation [039; 50]	0.039	1 - 2	50	2.100	E
G	15.0	OSB	0.130	200	600	1.700	D
H	40.0	spruce wood cross battens (a=400) or battens offset)	0.120	50	450	1.600	D
I	40.0	Wood fibre insulation [039; 50]	0.039	1 - 2	50	2.100	E
J	19.0	planking tongue and groove	0.120	50	450	1.600	D

### Sustainability rating (per $\text{m}^2$ )

#### Database ecoinvent

**O13<sub>Kon</sub>** 23.7

Calculated by IBO

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.150	0.056	1,96E-6	0.008	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	114.381	1039.579	1153.960	433.030	55.613	488.643