

## External wall - awrhh12a-03

external wall, timber frame construction, ventilated, with dry lining, with cladding, other surface

### Performance rating

**Fire protection performance** REI from inside 30  
 REI from outside 30  
 maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32 \text{ kN/m}$   
 Classified by HFA

#### Germany

F30 (from inside/from outside)

Load  $E_{d,fi}$  according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.7, Zeile 1


**Thermal performance** U Diffusion 0.17  $\text{W}/(\text{m}^2\text{K})$   
 suitable

Calculated by TUM

**Acoustic performance**  $R_w (C; C_{tr})$  53(-1;-6) dB  
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

**Mass per unit area** m 67.50  $\text{kg}/\text{m}^2$

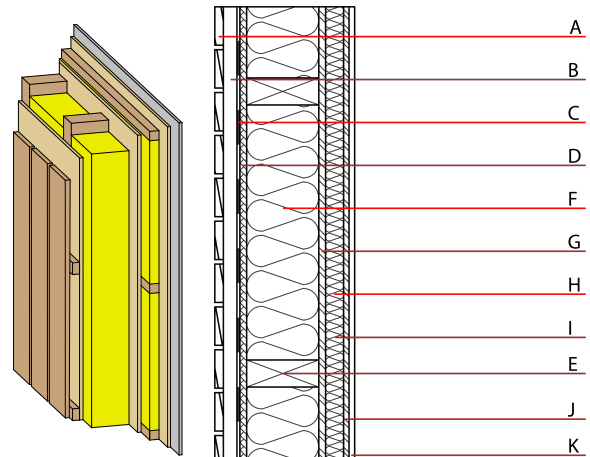

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min - max}$	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	larch wood battens offset (30/50; 30/80) - ventilation	0.155	150	600	1.600	D
C		wind barrier				1000	
D	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
E	200.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
F	200.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$ ]	0.040	1	30	1.030	A1
G	15.0	OSB	0.130	200	600	1.700	D
H	40.0	spruce wood cross battens (a=400) $\geq 40\text{mm}$	0.120	50	450	1.600	D
I	40.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$ ]	0.040	1	30	1.030	A1
J	12.0	OSB	0.130	200	600	1.700	D
K	12.5	gypsum plaster board type A	0.250	4 - 10	680	1.050	A2

### Sustainability rating (per $\text{m}^2$ )

#### Database ecoinvent

$OI3_{kon}$  35.2

Calculated by TUM

#### Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	53.880
Biogenic carbon in $\text{kg CO}_2\text{-e.}$	$\text{kg CO}_2$	78.940
Energy use of Primary Energy	MJ	784.010
Share of renewable PE	%	29.35

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.179	0.071	2,71E-6	0.009	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	127.654	834.285	961.938	548.785	48.370	597.154

### Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.144	0.024	1,85E-6	0.034	
C1 - C4		0.003	0.003	1,06E-7	0.000	
A1 - C4		0.148	0.027	1,96E-6	0.034	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	228.599	917.264	1145.870	534.085	38.788	572.970
C1 - C4	1.150	-911.635	-910.487	13.219	-26.477	-13.260
A1 - C4	230.137	5.888	236.030	553.871	12.364	566.330