

External wall - awrho01a-15

external wall, timber frame construction, ventilated, without dry lining, with cladding, other surface

Performance rating

Fire protection performance REI from inside 60
REI from outside 30
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$
Classified by HFA
Classified by HFA

Germany

F60 (from inside)/F30 (from outside)
Load $E_{d,fi}$ according to the German certification document
Corresponding proof: manufacturer-specific

Thermal performance U 0.18 W/(m²K)
Diffusion suitable


Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 49(-2;-8) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 65.70 kg/m²

Calculation based on gypsum plaster board type DF

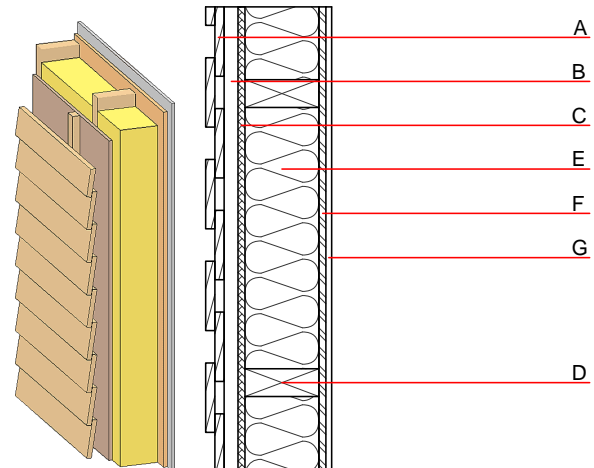

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire	
			λ	$\mu \text{ min} - \text{max}$	ρ	c	EN	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D	
B	30.0	spruce wood battens offset (30/50; 30/80) - ventilation	0.120	50	450	1.600	D	
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D	
D	240.0	construction timber (60/-; e=625)	0.120	50	450	1.600	D	
E	240.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$]	0.040	1	30	1.030	A1	
F	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D	
G	15.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2	
G	15.0	gypsum fibre board	0.320	21	1000	1.100	A2	

Sustainability rating (per m²)

Database ecoinvent

O13_{Kon} 27.9

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 48.410
Biogenic carbon in kg CO₂-e. kg CO₂ 70.700
Energy use of Primary Energy MJ 712.560
Share of renewable PE % 29.26

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.153	0.053	1,72E-6	0.052	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	124.906	719.202	844.108	405.904	28.891	434.796

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.131	0.022	1,80E-6	0.030	
C1 - C4		0.002	0.003	9,96E-8	0.000	
A1 - C4		0.136	0.025	1,91E-6	0.030	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	207.134	822.668	1030.232	485.320	35.974	521.400
C1 - C4	0.992	-817.086	-816.096	12.250	-24.390	-12.140
A1 - C4	208.513	5.840	214.783	504.051	11.636	515.800