

External wall - awrhho05a-12

external wall, timber frame construction, ventilated, without dry lining, with cladding, other surface

Performance rating

Fire protection performance REI from inside 30
 REI from outside 30
 maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$
 Classified by HFA
 Classified by HFA

Germany

F30 (from inside/from outside)
 Load $E_{d,fi}$ according to the German certification document
 Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.7, Zeile 4

Thermal performance U 0.18 $\text{W}/(\text{m}^2\text{K})$
 Diffusion suitable


Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 47(-2;-8) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 53.40 kg/m^2

Calculation based on gypsum plaster board type DF

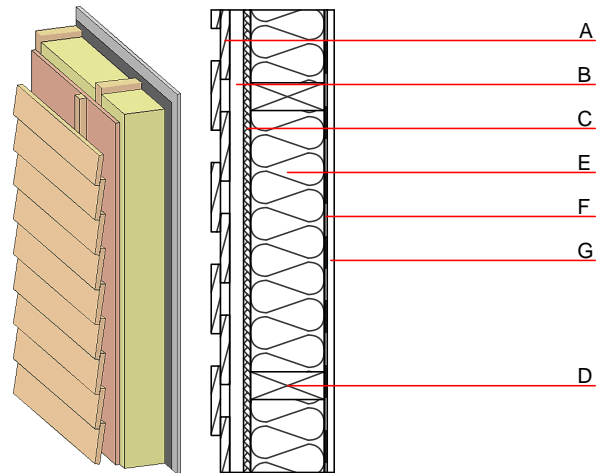

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens offset (30/50; 30/80) - ventilation	0.120	50	450	1.600	D
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	240.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
E	240.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$]	0.040	1	30	1.030	A1
F		vapour barrier $s_{d\geq 1\text{m}}$			1000		
G	15.0	gypsum fibre board or	0.320	21	1000	1.100	A2
G	15.0	gypsum plaster board type DF	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{Kon}$ 25.8

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 35.210
Biogenic carbon in $\text{kg CO}_2\text{-e}$. kg CO_2 50.310
Energy use of Primary Energy MJ 505.320
Share of renewable PE % 31.61

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.138	0.047	1,46E-6	0.049	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	108.499	572.689	681.188	355.965	22.510	378.474

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.107	0.018	1,71E-6	0.015	
C1 - C4		0.002	0.003	1,05E-7	0.000	
A1 - C4		0.112	0.021	1,83E-6	0.016	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	158.803	594.499	753.732	326.311	34.648	361.070
C1 - C4	0.441	-588.918	-588.476	11.428	-15.119	-3.690
A1 - C4	159.731	5.840	166.001	345.584	19.593	365.290