

## External wall - awrrho06a-03

external wall, timber frame construction, ventilated, without dry lining, with cladding, other surface

### Performance rating

**Fire protection performance** REI from inside 60  
 REI from outside 30  
 maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32,0 \text{ kN/m}$   
 Classified by HFA

**Thermal performance** U 0.18 W/(m<sup>2</sup>K)  
 Diffusion suitable


Calculated by HFA

**Acoustic performance**  $R_w (C; C_{tr})$  50(-2;-8) dB  
 $L_{n,w} (C_i)$

Battens for the ventilation space screwed onto the structural timber result in an  $R_w(C; C_{tr})=46(-1;-6)$  dB  
 Assessed by MA39

**Mass per unit area** m 50.30 kg/m<sup>2</sup>

Calculation based on gypsum plaster board type DF

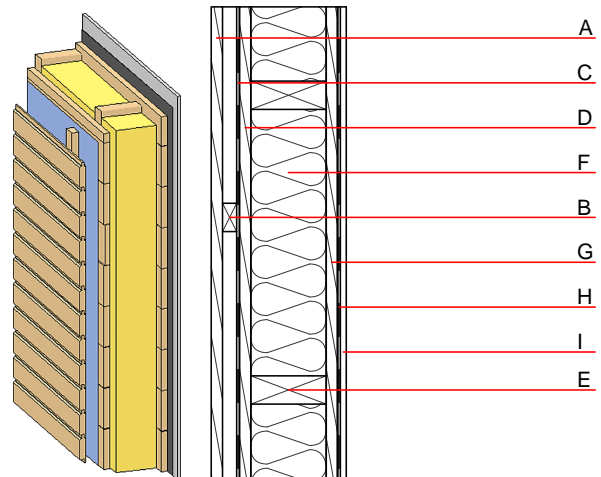

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens offset (30/50; 30/80) - ventilation	0.120	50	450	1.600	D
C		wind barrier			1000		
D	25.0	planking spruce wood	0.120	50	450	1.600	D
E	240.0	construction timber (60/...; e=*)	0.120	50	450	1.600	D
F	240.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
G	25.0	planking spruce wood	0.120	50	450	1.600	D
H		vapour barrier sd $\geq 5\text{m}$			1000		
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 20.3

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.125	0.057	2,17E-6	0.030	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	149.193	835.002	984.195	389.594	10.862	400.456