

External wall - awrhho07a-10

external wall, timber frame construction, ventilated, without dry lining, with cladding, other surface

Performance rating

Fire protection performance REI from inside 60
 REI from outside 30
 maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$
 Classified by HFA
 Classified by HFA

Germany

F60 (from inside/from outside)
 Load $E_{d,fi}$ according to the German certification document
 Corresponding proof: manufacturer-specific

Thermal performance U 0.17 $\text{W}/(\text{m}^2\text{K})$
 Diffusion suitable


Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 47(-2;-8) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 59.40 kg/m^2

Calculation based on gypsum plaster board type DF

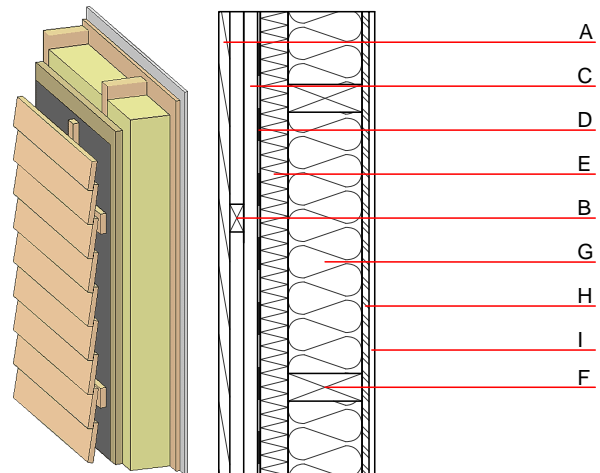

Note: According to OIB-RL 2 (Austria) is for ventilated and insulated facades (from building class 2) an insulation material with minimum Euroclass D required.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	30.0	spruce wood battens - ventilation	0.120	50	450	1.600	D
C	30.0	spruce wood cross battens	0.120	50	450	1.600	D
D		wind barrier			1000		
E	60.0	wood-fibre insulation board [045; 140]	0.045	2 - 5	140	2.100	E
F	200.0	construction timber (60/..; e=625)	0.120	50	450	1.600	D
G	200.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$]	0.040	1	30	1.030	A1
H	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m^2)

Database ecoinvent

O13_{kon} 29.1

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 46.220
 Biogenic carbon in $\text{kg CO}_2\text{-e}$. kg CO_2 67.880
 Energy use of Primary Energy MJ 651.180
 Share of renewable PE % 33.28

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.152	0.057	2,02E-6	0.048	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	123.746	688.197	811.942	428.049	29.328	457.376

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.115	0.019	8,60E-7	0.023	
C1 - C4		0.002	0.002	8,03E-8	0.000	
A1 - C4		0.119	0.022	9,49E-7	0.023	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	215.231	717.891	933.026	413.829	53.362	467.280
C1 - C4	1.099	-711.708	-710.610	14.364	-17.032	-2.670
A1 - C4	216.717	6.442	223.062	434.466	36.382	470.940