

External wall - awrho09a-01

external wall, timber frame construction, ventilated, without dry lining, with cladding, wooden surface

Performance rating

Fire protection performance	REI from inside	30
	REI from outside	30
maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 32 kN/m		
Classified by HFA		

Thermal performance	U	0.16 W/(m ² K)
	Diffusion	suitable


Calculated by HFA

Acoustic performance	R_w (C;C _{tr})	44(-2;-6) dB
	$L_{n,w}$ (C _i)	

with closed wooden facade R_w von 47 (-2; -8)

Assessed by TGM

Mass per unit area	m	55.70 kg/m ²
--------------------	---	-------------------------

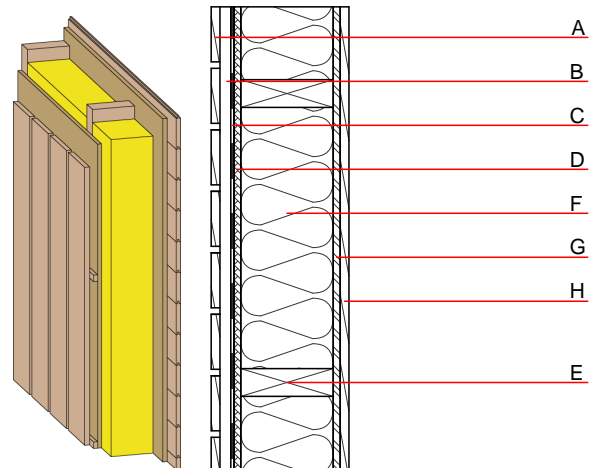

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	19.0	larch wood external wall cladding (open) vertical	0.155	150	600	1.600	D
B	30.0	larch wood - cross battens (30/50; 30/80) - ventilation	0.155	150	600	1.600	D
C		wind barrier			1000		
D	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
E	240.0	construction timber (60/-; e=625)	0.120	50	450	1.600	D
F	240.0	mineral wool [0,35; ≥20; <1000°C]	0.035	1	20	1.030	A1
G	15.0	OSB	0.130	200	600	1.700	D
H	19.0	planking tongue and groove	0.120	50	450	1.600	D

Sustainability rating (per m²)

Database ecoinvent

013 _{kon}	32.0
--------------------	------

Calculated by IBO

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.166	0.075	2,59E-6	0.031	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	153.105	843.817	996.922	513.864	38.887	552.751