


## External wall - awrohi01b-06

external wall, timber frame construction, not ventilated, with dry lining, with cladding, other surface

### Performance rating

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	30
maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 19,2 kN/m Classified by HFA		
<b>Thermal performance</b>	U	0.12 W/(m <sup>2</sup> K)
	Diffusion	suitable
Calculated by HFA		
<b>Acoustic performance</b>	$R_w$ (C;C <sub>tr</sub> )	56(-2;-8) dB
	$L_{n,w}$ (C <sub>i</sub> )	
battens for the dry lining mounted offset without using resilient clips will result in $R_w(C;C_{tr})=53(-2;-6)$ dB Assessed by MA39		
<b>Mass per unit area</b>	m	83.60 kg/m <sup>2</sup>
Calculation based on GF		

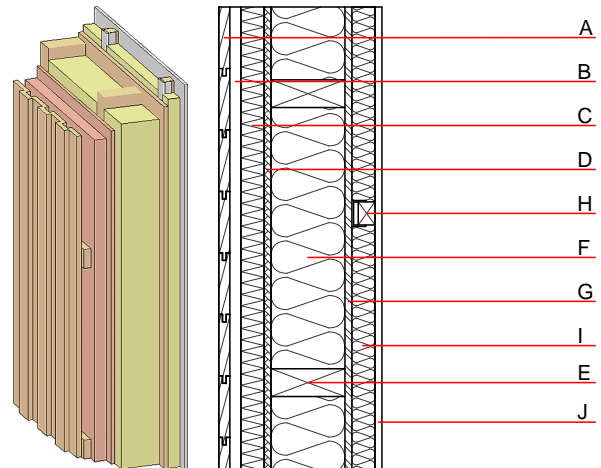

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	24.0	spruce wood cross battens	0.120	50	450	1.600	D
C	50.0	wood wool composite boards	0.090	2 - 5	370	2.000	B
D	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
E	240.0	construction timber (60/...; e=*)	0.120	50	450	1.600	D
F	240.0	mineral wool [040; ≥16; <1000°C]	0.040	1	16	1.030	A1
G	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
H	80.0	spruce wood battens offset mounted on resilient clips	0.120	50	450	1.600	D
I	80.0	mineral wool [040; ≥16; <1000°C] or air layer in type 02	0.040	1	16	1.030	A1
J	15.0	gypsum fibre board or	0.320	21	1000	1.100	A2
J	15.0	gypsum plaster board type DF	0.250	10	800	1.050	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 35.8

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.176	0.076	3,14E-6	0.033	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	153.588	901.300	1054.889	594.114	28.891	623.005