

External wall - awrohi02a-09

external wall, timber frame construction, not ventilated, with dry lining, with cladding, other surface


Performance rating

Fire protection performance
 REI from inside 60
 REI from outside 30
 maximum ceiling height = 3 m; maximum load $E_{d,fi} = 19,2 \text{ kN/m}$
 Classified by HFA

Thermal performance
 U 0.17 $\text{W}/(\text{m}^2\text{K})$
 Diffusion suitable
 Calculated by HFA

Acoustic performance
 $R_w (C;C_{tr})$ 50(-3;-9) dB
 $L_{n,w} (C_i)$
 Vertical battens for the dry lining screwed onto the ledger beams lead to an $R_w(C;Ctr)=47(-1;-5)$ dB
 Assessed by MA39

Mass per unit area m 71.50 kg/m^2
 Calculation based on GF

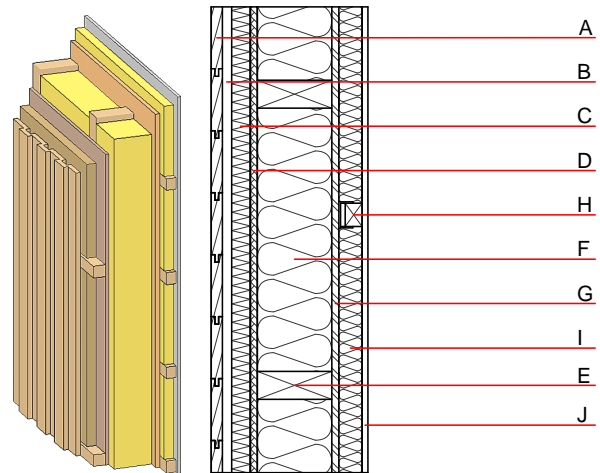

Note: e=625

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

| | Thickness | Building material | Thermal performance | | | | Reaction to fire EN |
|---|-----------|--|---------------------|-----------------|--------|-------|---------------------|
| | | | λ | μ min – max | ρ | c | |
| A | 24.0 | larch wood external wall cladding | 0.155 | 150 | 600 | 1.600 | D |
| B | 50.0 | spruce wood cross battens | 0.120 | 50 | 450 | 1.600 | D |
| C | 40.0 | softboard [045; 250] - rigid underlay | 0.045 | 5 | 250 | 2.100 | E |
| D | 15.0 | fibreboard (MDF) | 0.140 | 11 | 600 | 1.700 | D |
| E | 160.0 | construction timber (60/..; e=*) | 0.120 | 50 | 450 | 1.600 | D |
| F | 160.0 | cellulose fibre [040; E] | 0.040 | 1 - 2 | 55 | 2.000 | E |
| G | 15.0 | OSB (sealed with airtight tape) | 0.130 | 200 | 600 | 1.700 | D |
| H | 40.0 | spruce wood cross battens (a=400) or battens offset) | 0.120 | 50 | 450 | 1.600 | D |
| I | 40.0 | cellulose fibre [040; E] or air layer in type O2 | 0.040 | 1 - 2 | 55 | 2.000 | E |
| J | 12.5 | gypsum fibre board or | 0.320 | 21 | 1000 | 1.100 | A2 |
| J | 12.5 | gypsum plaster board type DF | 0.250 | 10 | 800 | 1.050 | A2 |

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{kon}$ 23.6

Calculated by HFA

Details of sustainability rating

Database ecoinvent

| Lifecycle (Phases) | GWP [kg CO ₂ -e.] | AP [kg SO ₂ -e.] | EP [kg PO ₄ -e.] | ODP [kg R11-e.] | POCP [kg Ethen-e.] | |
|-----------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|-----------------------|--|
| A1 - A3 | | 0.138 | 0.059 | 2,22E-6 | 0.026 | |

| Lifecycle (Phases) | PERE [MJ] | PERM [MJ] | PERT [MJ] | PENRE [MJ] | PENRM [MJ] | PENRT [MJ] |
|-----------------------|--------------|--------------|--------------|---------------|---------------|---------------|
| A1 - A3 | 145.526 | 973.518 | 1119.044 | 442.097 | 42.896 | 484.993 |