

### External wall - awroho03a-06

external wall, timber frame construction, not ventilated, without dry lining, with cladding, other surface

#### Performance rating

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	30

maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32,0 \text{ kN/m}$   
 Classified by HFA

<b>Thermal performance</b>	U	0.21 W/(m <sup>2</sup> K)
	Diffusion	suitable


Calculated by HFA

<b>Acoustic performance</b>	$R_w (C;C_{tr})$	50(-2;-7) dB
	$L_{n,w} (C_i)$	

Vertical external battens screwed onto the ledger beams lead to an  $R_w(C;C_{tr})=46(-1;-5) \text{ dB}$   
 Assessed by MA39

<b>Mass per unit area</b>	m	72.30 kg/m <sup>2</sup>
---------------------------	---	-------------------------

Calculation based on GF

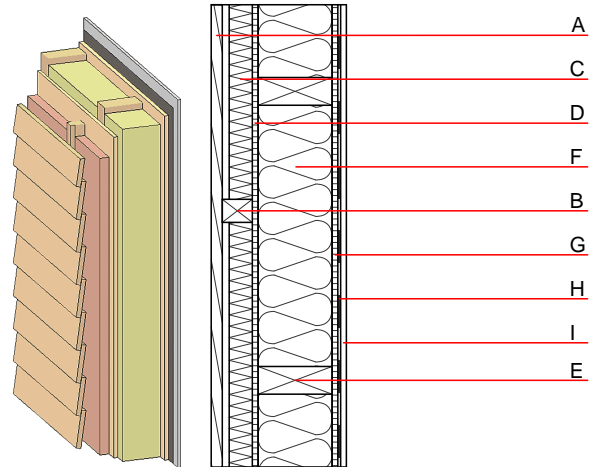

Note: e=625

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	65.0	spruce wood cross battens	0.120	50	450	1.600	D
C	50.0	wood wool composite boards	0.090	2 - 5	370	2.000	B
D	16.0	particleboard	0.130	50 - 100	700	1.700	D
E	160.0	construction timber (60/..; e=*)	0.120	50	450	1.600	D
F	160.0	cellulose fibre [0,040; R=55]	0.040	1 - 2	55	2.000	B
G	12.0	particleboard	0.130	50 - 100	700	1.700	D
H		vapour barrier $s_d \geq 10m$				1000	
I	12.5	gypsum fibre board or	0.320	21	1000	1.100	A2
I	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

#### Sustainability rating (per m<sup>2</sup>)

##### Database ecoinvent

$OI3_{Kon}$  19.9

Calculated by HFA

### Details of sustainability rating

#### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.106	0.043	1,84E-6	0.026	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	96.268	810.694	906.963	399.942	41.362	441.305