


## External wall - awropi06a-09

external wall, timber frame construction, not ventilated, with dry lining, with rendering, other surface

### Performance rating

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	30
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$ Classified by HFA		
<b>Thermal performance</b>	U	0.17 W/(m <sup>2</sup> K)
	Diffusion	suitable
Calculated by HFA		
<b>Acoustic performance</b>	$R_w (C; C_{tr})$	45(-3;-6) dB
	$L_{n,w} (C_i)$	
vertical battens for the dry lining screwed onto the structural timber lead to an $R_w(C; C_{tr})=42(-1;-5) \text{ dB}$ Assessed by MA39/HFA		
<b>Mass per unit area</b>	m	55.50 kg/m <sup>2</sup>
Calculation based on gypsum plaster board type DF		

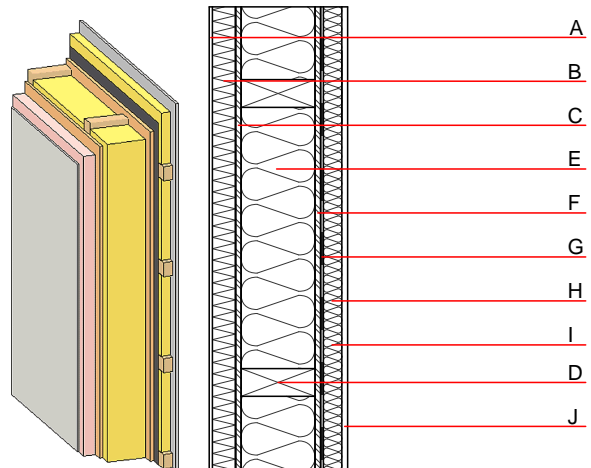

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	4.0	plaster	1.000	10 - 35	2000	1.130	A1
B	50.0	Polystyrene EPS-F [0,040]	0.040	20 - 50	17	1.450	E
C	15.0	OSB	0.130	200	600	1.700	D
D	160.0	construction timber (60/...; e=625) (60/...; e=*)	0.120	50	450	1.600	D
E	160.0	cellulose fibre [040; E]	0.040	1 - 2	55	2.000	E
F	15.0	OSB	0.130	200	600	1.700	D
G		vapour barrier $s_d \geq 23 \text{ m}$			1000		
H	40.0	spruce wood cross battens (a=400) resp. battens offset cross battens (a=400) or battens offset	0.120	50	450	1.600	D
I	40.0	cellulose fibre [0,040; R=55] or air layer in type 02	0.040	1 - 2	55	2.000	B
J	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
J	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

OI3<sub>Kon</sub> 23.4

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.109	0.042	1,83E-6	0.024	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	95.811	531.174	626.985	351.903	57.383	409.286