

## External wall - awropi20b-10

external wall, timber frame construction, not ventilated, with dry lining, with rendering, other surface

### Performance rating

Fire protection performance	REI from inside	60
	REI from outside	60

maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32,0 \text{ kN/m}$   
Classified by HFA

Thermal performance	U	0.19 W/(m <sup>2</sup> K)
	Diffusion	suitable


Calculated by HFA

Acoustic performance	$R_w (C; C_{tr})$	52(-2;-9) dB
	$L_{n,w} (C_i)$	

Vertical battens for the dry lining screwed onto the ledger beams lead to an  $R_w(C; C_{tr})=50(-1;-7)$  dB  
Assessed by MA39

Mass per unit area	m	70.00 kg/m <sup>2</sup>
--------------------	---	-------------------------

Calculation based on gypsum plaster board type DF

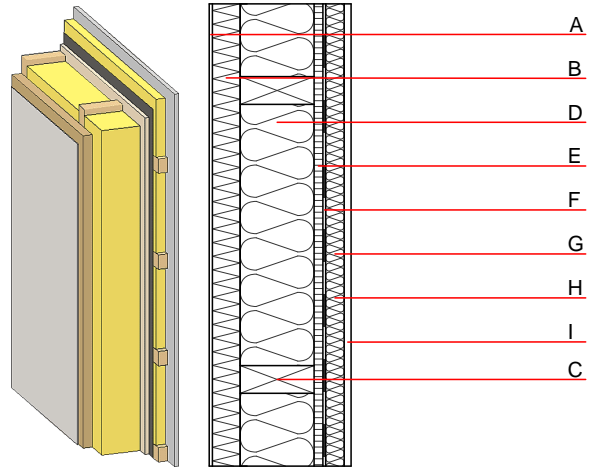

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1
B	60.0	wood-fibre insulation board WF-PT [045; 180]	0.045	5 - 7	180	2.100	E
C	160.0	construction timber (60/-; e=*)	0.120	50	450	1.600	D
D	160.0	sheep wool [0,041; R=26]	0.041	1	30	1.720	E
E	19.0	particleboard P4	0.130	50 - 100	700	1.700	D
F		vapour barrier sd $\geq$ 2m			1000		
G	40.0	spruce wood cross battens (a=400) or battens offset	0.120	50	450	1.600	D
H	40.0	sheep wool [0,041; R=26] or air layer in type 02	0.041	1	30	1.720	E
I	15.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	15.0	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

OI3 <sub>Kon</sub>	34.5
--------------------	------

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.135	0.060	3,04E-6	0.025	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	71.487	717.009	788.496	577.996	58.524	636.520