

## External wall - awropi28a-02

external wall, timber frame construction, not ventilated, with dry lining, with rendering, wooden surface

### Performance rating

Fire protection performance	REI from inside	60
	REI from outside	90

maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32,0 \text{ kN/m}$   
 Classified by HFA


Thermal performance	U	0.19 W/(m <sup>2</sup> K)
	Diffusion	suitable

Calculated by HFA

Acoustic performance	$R_w (C; C_{tr})$	48(-3;-10) dB
	$L_{n,w} (C_i)$	

If battens for the dry lining are carried out vertically and screwed to the structural timber the result is  $R_w \geq 45 \text{ dB}$   
 Assessed by HFA

Mass per unit area	m	57.30 kg/m <sup>2</sup>
--------------------	---	-------------------------

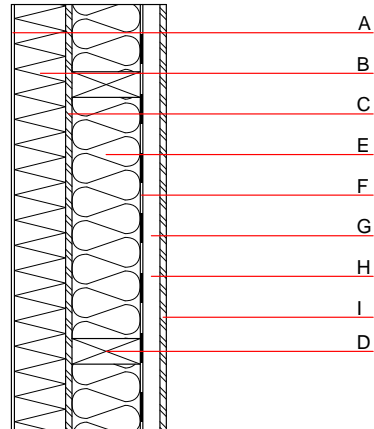

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	5.0	plaster	1.000	10 - 35	2000	1.130	A1
B	120.0	MW-PT [038; 95]	0.038		95		A1
C	15.0	OSB	0.130	200	600	1.700	D
D	200.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
E	200.0	mineral wool [038; $\geq 33$ ; $\geq 1000^\circ\text{C}$ ]	0.038	1	33	1.030	A1
F		vapour barrier $s_d \geq 23 \text{ m}$			1000		
G	40.0	spruce wood cross battens 40/60mm (a=400)	0.120	50	450	1.600	D
H	40.0	air layer	0.000	1	1	1.008	
I	16.0	Kronospan OSB-Firestop	0.110	150 - 170	660	1.700	B

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 67.3

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.320	0.094	2,85E-6	0.117	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	83.708	496.852	580.561	696.034	27.222	723.257