


**External wall - awropo07a-00**

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

**Performance rating**

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	30
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$ Classified by HFA		
<b>Thermal performance</b>	U	0.20 $\text{W}/(\text{m}^2\text{K})$
	Diffusion	suitable
Calculated by HFA		
<b>Acoustic performance</b>	$R_w (C;C_{tr})$	44(-2;-6) dB
	$L_{n,w} (C_i)$	
Assessed by MA39		
<b>Mass per unit area</b>	m	47.30 $\text{kg}/\text{m}^2$
Calculation based on gypsum plaster board type DF		

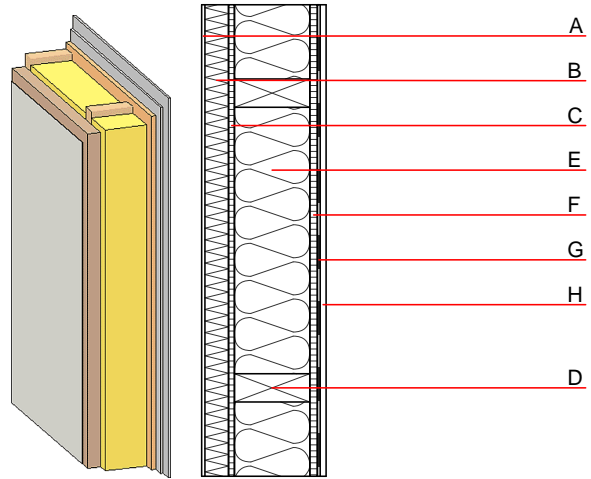

Note: e=625

**Register of building materials used for this application, cross-section** (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	4.0	plaster	1.000	10 - 35	2000	1.130	A1
B	50.0	Polystyrene EPS-F [0,040]	0.040	20 - 50	17	1.450	E
C	16.0	particleboard	0.130	50 - 100	700	1.700	D
D	160.0	construction timber (60/..; e=*)	0.120	50	450	1.600	D
E	160.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
F	16.0	particleboard	0.130	50 - 100	700	1.700	D
G		vapour barrier $s_{d\geq 17\text{m}}$			1000		
H	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
H	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

**Sustainability rating** (per  $\text{m}^2$ )

**Database ecoinvent**

$OI3_{Kon}$  30.4

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.113	0.047	1,96E-6	0.027	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	41.389	411.676	453.065	456.203	79.102	535.305