

## External wall - awropo09a-15

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

### Performance rating

**Fire protection performance** REI from inside 60  
REI from outside 60  
maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32,0 \text{ kN/m}$   
Classified by HFA  
Classified by HFA

#### Germany

F60 (from inside/from outside)  
Load  $E_{d,fi}$  according to the German certification document  
Corresponding proof: manufacturer-specific

**Thermal performance** U 0.15 W/(m<sup>2</sup>K)  
Diffusion suitable


Calculated by TUM

**Acoustic performance**  $R_w (C; C_{tr})$  52(-3;-11) dB  
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

**Mass per unit area** m 62.60 kg/m<sup>2</sup>

Calculation based on gypsum plaster board type DF

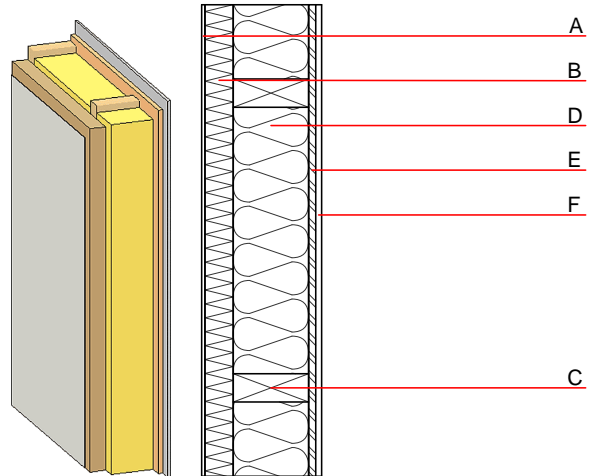

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1
B	60.0	wood-fibre insulation board WF-PT [045; 180]	0.045	5 - 7	180	2.100	E
C	240.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
D	240.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$ ]	0.040	1	30	1.030	A1
E	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
F	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
F	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

O13<sub>Kon</sub> 41.4

Calculated by HFA

#### Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	34.160
Biogenic carbon in kg CO <sub>2</sub> -e.	kg CO <sub>2</sub>	50.250
Energy use of Primary Energy	MJ	613.360
Share of renewable PE	%	29.13

Calculated by TUM

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.188	0.069	2,75E-6	0.052	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	100.783	581.194	681.977	552.492	34.612	587.104

### Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.118	0.019	7,74E-7	0.021	
C1 - C4		0.003	0.003	5,11E-8	0.000	
A1 - C4		0.124	0.023	8,34E-7	0.021	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	177.265	509.728	687.914	415.844	29.287	445.240
C1 - C4	0.998	-503.219	-502.057	12.384	-17.052	-2.470
A1 - C4	178.651	6.768	186.707	434.709	12.287	452.670