


**External wall - awropo14a-03**

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

**Performance rating**

<b>Fire protection performance</b>	REI from inside	60
	REI from outside	60
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$ Classified by HFA		
<b>Thermal performance</b>	U	0.17 W/(m <sup>2</sup> K)
	Diffusion	suitable
Calculated by HFA		
<b>Acoustic performance</b>	$R_w (C; C_{tr})$	53(-3;-8) dB
	$L_{n,w} (C_i)$	
Assessed by MA39		
<b>Mass per unit area</b>	m	67.50 kg/m <sup>2</sup>
Calculation based on gypsum plaster board type DF		

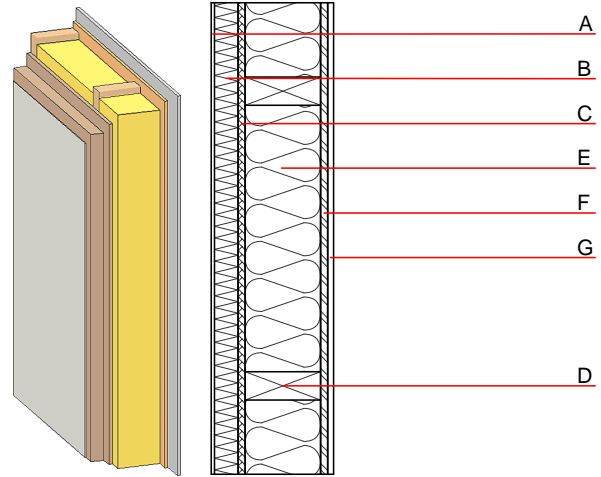

Note: e=625

**Register of building materials used for this application, cross-section** (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	10.0	plaster	1.000	10 - 35	2000	1.130	A1
B	50.0	wood wool composite boards	0.090	2 - 5	370	2.000	B
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	240.0	construction timber (60/..; e=*)	0.120	50	450	1.600	D
E	240.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
F	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
G	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
G	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

**Sustainability rating** (per m<sup>2</sup>)

**Database ecoinvent**

$OI3_{kon}$	33.3
Calculated by HFA	

### Details of sustainability rating

#### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.147	0.062	2,73E-6	0.022	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	98.366	582.369	680.735	508.053	29.196	537.250