

External wall - awropo16a-07

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

Performance rating

| | | |
|---|------------------|----|
| Fire protection performance | REI from inside | 60 |
| | REI from outside | 60 |
| maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$ | | |
| Classified by HFA | | |

| | | |
|----------------------------|-----------|--------------------------------------|
| Thermal performance | U | 0.24 $\text{W}/(\text{m}^2\text{K})$ |
| | Diffusion | suitable |


Calculated by HFA

| | | |
|-----------------------------|-------------------|---------------|
| Acoustic performance | $R_w (C; C_{tr})$ | 51 (-3;-8) dB |
| | $L_{n,w} (C_i)$ | |

Assessed by MA39

| | | |
|---------------------------|---|------------------------------|
| Mass per unit area | m | 67.90 kg/m^2 |
|---------------------------|---|------------------------------|

Calculation based on gypsum plaster board type DF

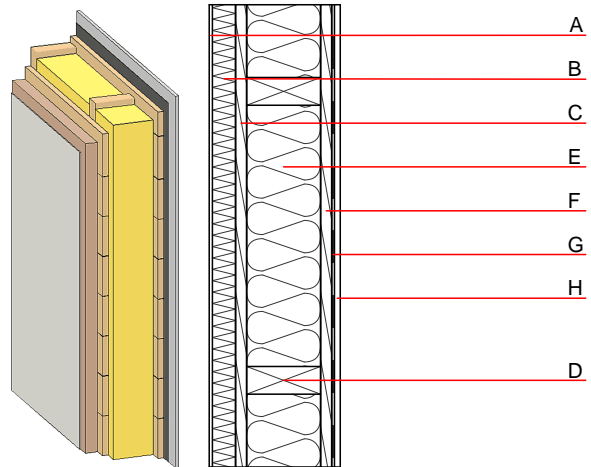

Note: e=625

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

| | Thickness | Building material | Thermal performance | | | | Reaction to fire EN |
|---|-----------|-------------------------------------|---------------------|-----------------|--------|-------|------------------------|
| | | | λ | μ min - max | ρ | c | |
| A | 10.0 | plaster | 1.000 | 10 - 35 | 2000 | 1.130 | A1 |
| B | 50.0 | wood wool composite boards | 0.090 | 2 - 5 | 370 | 2.000 | B |
| C | 24.0 | planking spruce wood | 0.120 | 50 | 450 | 1.600 | D |
| D | 160.0 | construction timber (60/., e=*) | 0.120 | 50 | 450 | 1.600 | D |
| E | 160.0 | sheep wool [0,041; R=26] | 0.041 | 1 | 30 | 1.720 | E |
| F | 24.0 | planking spruce wood | 0.120 | 50 | 450 | 1.600 | D |
| G | | vapour barrier $s_d \geq 7\text{m}$ | | | 1000 | | |
| H | 12.5 | gypsum plaster board type DF or | 0.250 | 10 | 800 | 1.050 | A2 |
| H | 12.5 | gypsum fibre board | 0.320 | 21 | 1000 | 1.100 | A2 |

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{Kon}$ 15.5

Calculated by HFA

Details of sustainability rating

Database ecoinvent

| Lifecycle (Phases) | GWP [kg CO ₂ -e.] | AP [kg SO ₂ -e.] | EP [kg PO ₄ -e.] | ODP [kg R11-e.] | POCP [kg Ethen-e.] | |
|-----------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|-----------------------|--|
| A1 - A3 | | 0.083 | 0.034 | 2,04E-6 | 0.021 | |

| Lifecycle (Phases) | PERE [MJ] | PERM [MJ] | PERT [MJ] | PENRE [MJ] | PENRM [MJ] | PENRT [MJ] |
|-----------------------|--------------|--------------|--------------|---------------|---------------|---------------|
| A1 - A3 | 98.976 | 707.690 | 806.666 | 327.642 | 5.632 | 333.274 |