

## External wall - awropo18a-03

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

### Performance rating

|                                                                                                |                  |    |
|------------------------------------------------------------------------------------------------|------------------|----|
| Fire protection performance                                                                    | REI from inside  | 60 |
|                                                                                                | REI from outside | 60 |
| maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32,0 \text{ kN/m}$<br>Classified by HFA |                  |    |

|                     |           |                           |
|---------------------|-----------|---------------------------|
| Thermal performance | U         | 0.15 W/(m <sup>2</sup> K) |
|                     | Diffusion | suitable                  |


Calculated by HFA

|                      |                   |              |
|----------------------|-------------------|--------------|
| Acoustic performance | $R_w (C; C_{tr})$ | 53(-3;-9) dB |
|                      | $L_{n,w} (C_i)$   |              |

Assessed by MA39

|                    |   |                         |
|--------------------|---|-------------------------|
| Mass per unit area | m | 73.70 kg/m <sup>2</sup> |
|--------------------|---|-------------------------|

Calculation based on gypsum plaster board type DF

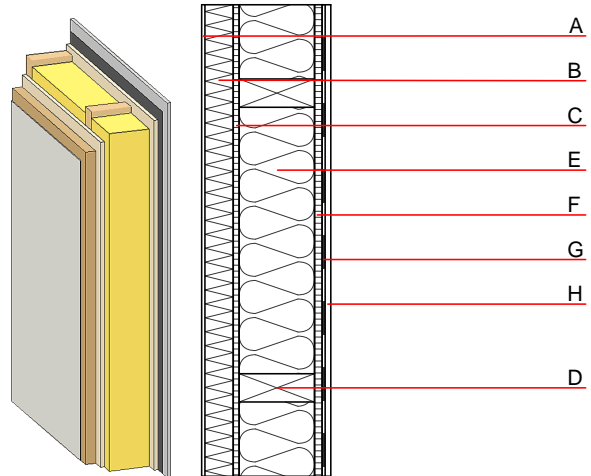

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

|   | Thickness | Building material                                       | Thermal performance |                 |        |       | Reaction to fire<br>EN |
|---|-----------|---------------------------------------------------------|---------------------|-----------------|--------|-------|------------------------|
|   |           |                                                         | $\lambda$           | $\mu$ min - max | $\rho$ | c     |                        |
| A | 7.0       | plaster                                                 | 1.000               | 10 - 35         | 2000   | 1.130 | A1                     |
| B | 60.0      | wood-fibre insulation board WF-PT [045; 180]            | 0.045               | 5 - 7           | 180    | 2.100 | E                      |
| C | 12.0      | particleboard                                           | 0.130               | 50 - 100        | 700    | 1.700 | D                      |
| D | 240.0     | construction timber (60/-; e=*)                         | 0.120               | 50              | 450    | 1.600 | D                      |
| E | 240.0     | mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ] | 0.040               | 1               | 16     | 1.030 | A1                     |
| F | 16.0      | particleboard                                           | 0.130               | 50 - 100        | 700    | 1.700 | D                      |
| G |           | vapour barrier sd $\geq 7\text{m}$                      |                     |                 | 1000   |       |                        |
| H | 12.5      | gypsum plaster board type DF or                         | 0.250               | 10              | 800    | 1.050 | A2                     |
| H | 12.5      | gypsum fibre board                                      | 0.320               | 21              | 1000   | 1.100 | A2                     |

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

|                    |      |
|--------------------|------|
| OI3 <sub>Kon</sub> | 42.7 |
|--------------------|------|

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

| Lifecycle<br>(Phases) | GWP<br>[kg CO <sub>2</sub> -e.] | AP<br>[kg SO <sub>2</sub> -e.] | EP<br>[kg PO <sub>4</sub> -e.] | ODP<br>[kg R11-e.] | POCP<br>[kg Ethen-e.] |               |
|-----------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|-----------------------|---------------|
| A1 - A3               |                                 | 0.172                          | 0.077                          | 3,23E-6            | 0.030                 |               |
| Lifecycle<br>(Phases) | PERE<br>[MJ]                    | PERM<br>[MJ]                   | PERT<br>[MJ]                   | PENRE<br>[MJ]      | PENRM<br>[MJ]         | PENRT<br>[MJ] |
| A1 - A3               | 76.395                          | 651.692                        | 728.087                        | 660.198            | 64.778                | 724.976       |