

External wall - awropo22b-11

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

Performance rating

Fire protection performance REI from inside 60
REI from outside 60
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 32 \text{ kN/m}$
Classified by HFA
Classified by HFA

Germany

F60 (from inside/from outside)
Load $E_{d,fi}$ according to the German certification document
Corresponding proof: manufacturer-specific

Thermal performance U 0.19 W/(m²K)
Diffusion suitable


Calculated by TUM

Acoustic performance R_w (C;C_{tr}) 51(-2;8) dB
 $L_{n,w}$ (C_i)

Assessed by Müller-BBM

Mass per unit area m 73.40 kg/m²

Calculation based on gypsum plaster board type DF

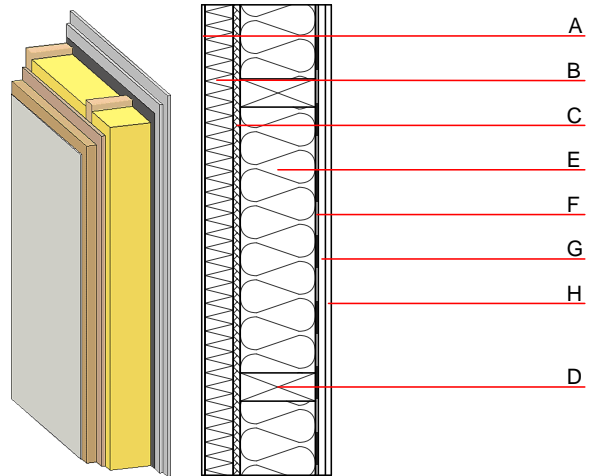

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1
B	60.0	wood-fibre insulation board [055; 200]	0.055	5 - 7	200	2.100	E
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	160.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D
E	160.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
F		vapour barrier sd \geq 3m			1000		
G	15.0	gypsum fibre board	0.320	21	1000	1.100	A2
H	12.5	gypsum fibre board or	0.320	21	1000	1.100	A2
H	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

Sustainability rating (per m²)

Database ecoinvent

Ol3_{Kon} 35.0

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 40.390
Biogenic carbon in kg CO₂-e. kg CO₂ 57.240
Energy use of Primary Energy MJ 934.610
Share of renewable PE % 35.51

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.146	0.062	2,98E-6	0.019	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	129.664	568.652	698.316	542.394	50.978	593.372

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.104	0.023	1,27E-6	0.023	
C1 - C4		0.004	0.001	8,51E-8	0.000	
A1 - C4		0.112	0.025	1,38E-6	0.023	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	329.548	829.211	1159.673	566.871	61.756	628.700
C1 - C4	1.504	-819.664	-817.994	24.007	-51.274	-25.060
A1 - C4	331.910	10.066	343.258	602.700	10.598	618.950