

### External wall - awropo22b-13

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

#### Performance rating

Fire protection performance	REI from inside	60
	REI from outside	60

maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 32 \text{ kN/m}$

Classified by HFA


Classified by HFA

Thermal performance	U	0.17 W/(m <sup>2</sup> K)
	Diffusion	suitable

Acoustic performance	$R_w (C; C_{tr})$	52(-2;-8) dB
	$L_{n,w} (C_i)$	

Mass per unit area	m	77.70 kg/m <sup>2</sup>
--------------------	---	-------------------------

Calculation based on gypsum plaster board type DF

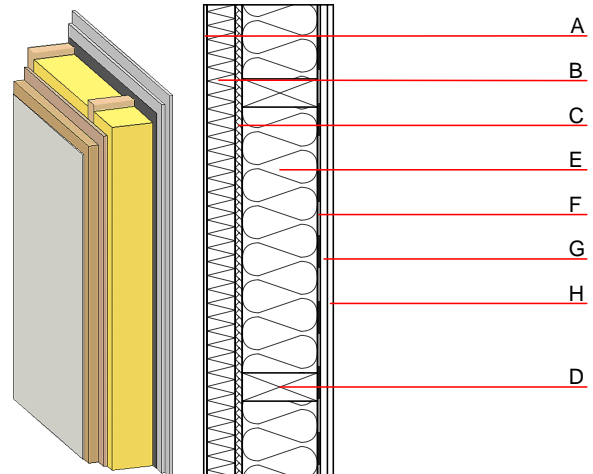

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min - max}$	$\rho$	c	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1
B	60.0	wood-fibre insulation board [055; 200]	0.055	5 - 7	200	2.100	E
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
D	200.0	construction timber (60/..; e=625)	0.120	50	450	1.600	D
E	200.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
F		vapour barrier $s_d \geq 3\text{m}$			1000		
G	15.0	gypsum fibre board	0.320	21	1000	1.100	A2
H	12.5	gypsum fibre board or	0.320	21	1000	1.100	A2
H	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

#### Sustainability rating (per m<sup>2</sup>)

##### Database ecoinvent

$OI3_{kon}$  35.0

Calculated by HFA

### Details of sustainability rating

#### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.157	0.065	2,95E-6	0.019	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	132.353	582.861	715.214	520.446	39.775	560.221