

External wall - awropo23b-00

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

Performance rating

Fire protection performance	REI from inside	60/K ₂ 60
	REI from outside	60/K ₂ 60

REI 90 (from inside/from outside); maximum ceiling height = 3 m; maximum load $E_{d,fi} = 19 \text{ kN/m}$
 Classified by HFA

Germany

manufacturer-specific

Load $E_{d,fi}$ according to the German certification document

Thermal performance	U	0.13 W/(m ² K)
	Diffusion	suitable


Calculated by TUM

Acoustic performance	R_w (C;C_{tr})	59(-2;-8) dB
	L_{n,w} (C_i)	

Assessed by Müller-BBM

Mass per unit area	m	84.20 kg/m ²
---------------------------	----------	-------------------------

Calculation based on gypsum plaster board type DF

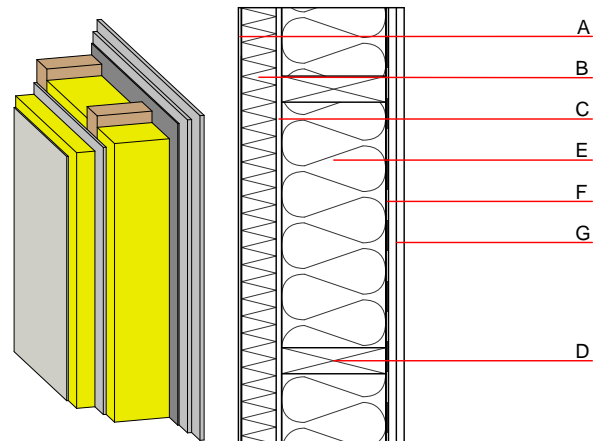

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	7.0	plaster	1.000	10 - 35	2000	1.130	A1
B	80.0	MW-PT [040; 150]	0.040	1	150	1.030	A1
C	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
D	240.0	construction timber (60/240; e=625)	0.120	50	450	1.600	D
E	240.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$]	0.040	1	30	1.030	A1
F		vapour barrier $sd \geq 2\text{m}$			1000		
G	36.0	gypsum plaster board type DF (2x18 mm) or	0.250	10	800	1.050	A2
G	36.0	gypsum fibre board (2x18 mm)	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

OI_{3kon} 65.8

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 11.360
Biogenic carbon in kg CO₂-e. kg CO₂ 16.580
Energy use of Primary Energy MJ 575.130
Share of renewable PE % 17.90

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.285	0.086	3,37E-6	0.101	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	103.420	188.675	292.094	693.424	4.993	698.417

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.179	0.026	1,10E-6	0.012	
C1 - C4		0.006	0.006	1,16E-7	0.001	
A1 - C4		0.193	0.035	1,25E-6	0.014	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	100.950	214.709	316.580	431.863	38.031	470.010
C1 - C4	0.473	-196.022	-195.385	17.501	-0.119	19.590
A1 - C4	102.965	19.463	123.717	472.160	38.116	515.970