
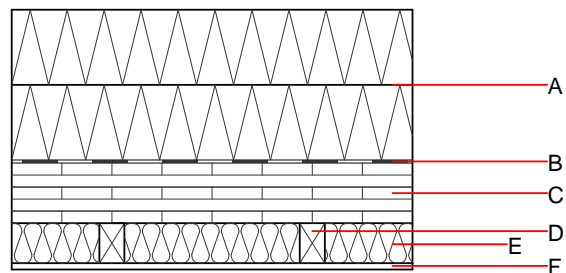


Floor towards attic (uninhabitable) - ddmxxi01a-00

floor towards attic (uninhabitable), solid wood construction, not suspended, dry, other surface

Performance rating

Fire protection performance	REI	60
maximum span = 5 m; maximum load $E_{d,fi} = 0,6 \text{ kN/m}^2$ Classified by HFA		
Thermal performance	U Diffusion	0.10 $\text{W}/(\text{m}^2\text{K})$ suitable
Acoustic performance	R_w ($C;C_{tr}$) $L_{n,w}$ (C_i)	46 dB
Assessed by HFA		
Mass per unit area	m	127.00 kg/m^2
Calculation based on gypsum plaster board type DF		

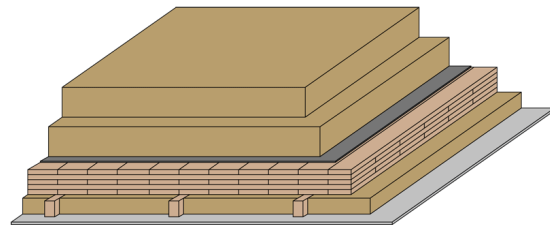

Note: A: pressure-resistant

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	300.0	wood-fibre insulation board [0,045; R=160]	0.045	5 - 7	160	2.100	E
B		foil (air tight)					
C	125.0	cross laminated timber $\geq 125\text{mm}$; 5-ply at least, surface layer at least 27,5	0.130	50	500	1.600	D
D	80.0	spruce wood battens (50/80; e=400)	0.120	50	450	1.600	D
E	80.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
F	12.5	gypsum plaster board type DF / gypsum fibre board	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Database ecoinvent

013_{kon} 70.8

Calculated with gypsum plaster fire protection board (GKF/DF); this data includes 3-, 5-, and 7-ply cross laminated timber elements;
 Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.336	0.148	6,39E-6	0.075	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	152.610	1879.913	2032.523	1232.926	115.014	1347.940