

Floor towards attic (uninhabitable) - ddmxxi02a-00

floor towards attic (uninhabitable), solid wood construction, not suspended, dry, wooden surface

Performance rating

Fire protection performance REI 60

maximum span = 5 m; maximum load $E_{d,fi} = 0,6 \text{ kN/m}^2$
 Classified by HFA

Thermal performance U Diffusion 0.10 $\text{W}/(\text{m}^2\text{K})$
 suitable



Calculated by HFA

Acoustic performance $R_w (C;C_{tr})$ 46 dB
 $L_{n,w} (C_i)$

Assessed by HFA

Mass per unit area m 116.20 kg/m^2

Calculation based on gypsum plaster board type DF

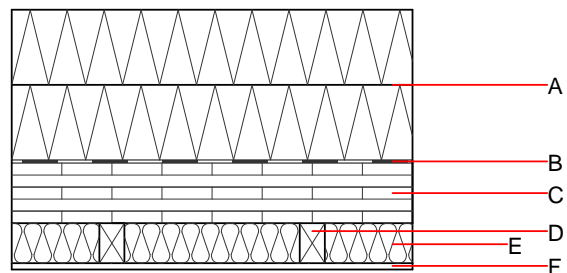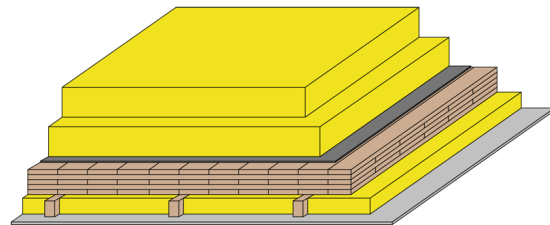

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	300.0	mineral wool [040; 130; $\geq 1000^\circ\text{C}$]	0.040	1	130	1.030	A1
B		foil (air tight)					
C	125.0	cross laminated timber $\geq 125\text{mm}$; 5-ply at least, surface layer at least 27,5	0.130	50	500	1.600	D
D	80.0	spruce wood battens (50/80; e=400)	0.120	50	450	1.600	D
E	80.0	mineral wool [040; 20]	0.040	1	20	1.030	A2
F	12.5	gypsum plaster board type DF / gypsum fibre board	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Database ecoinvent

OI_{3kon} 130.5

Calculated with gypsum plaster fire protection board (GKF/DF); this data includes 3-, 5-, and 7-ply cross laminated timber elements;
 Calculated by HFA

Details of sustainability rating

Databaseecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.625	0.190	5,70E-6	0.248	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	80.431	936.890	1017.321	1381.977	25.935	1407.912