

### Floor towards attic (uninhabitable) - ddrtxn06a-06

floor towards attic (uninhabitable), timber frame construction, not suspended, dry, other surface

#### Performance rating

**Fire protection performance** REI 30

maximum span = 5 m; maximum load  $E_{d,fi} = 3,66 \text{ kN/m}^2$   
 Classified by HFA

**Thermal performance** U Diffusion 0.22  $\text{W}/(\text{m}^2\text{K})$   
 suitable



Calculated by HFA

**Acoustic performance**  $R_w (C;C_{tr})$  45(-2;-8) dB  
 $L_{n,w} (C_i)$

Assessed by TGM

**Mass per unit area** m 57.80  $\text{kg}/\text{m}^2$

Calculation based on GF

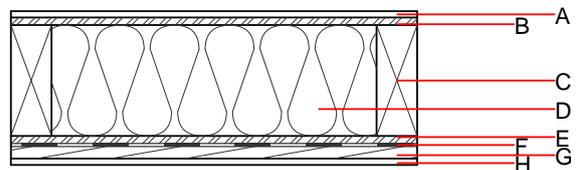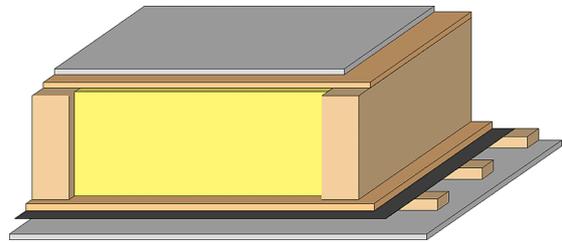

Note: e=625

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
A	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
B	15.0	OSB	0.130	200	600	1.700	D
C	220.0	spruce wood floor joists (80/*); e=*	0.120	50	450	1.600	D
D	220.0	sheep wool [0,041; R=16]	0.041	1	16	1.720	E
E	15.0	OSB	0.130	200	600	1.700	D
F		vapour barrier $s_d \geq 7\text{m}$			1000		
G	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
H	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
H	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

#### Sustainability rating (per $\text{m}^2$ )

##### Database ecoinvent

$OI3_{Kon}$  16.6

Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.082	0.034	1,92E-6	0.020	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	111.980	643.423	755.402	334.760	26.832	361.592