
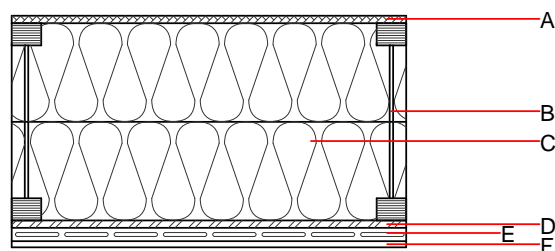


Floor towards attic (uninhabitable) - ddrxxa01a-03

floor towards attic (uninhabitable), timber frame construction, suspended, dry, other surface

Performance rating

Fire protection performance	REI	60
maximum span = 5 m; maximum load $E_{d,fi} = 3,5 \text{ kN/m}^2$ Classified by HFA		
Thermal performance	U	0.10 W/(m ² K)
	Diffusion	suitable
The stated thermal characteristics in the product data sheet are specified for the hard board intermediate web; the flanges are calculated with solid wood. Calculated by HFA		
Acoustic performance	$R_w (C;C_{tr})$ $L_{n,w} (C_i)$	41 dB
Assessed by HFA		
Mass per unit area	m	64.80 kg/m ²
Calculation based on gypsum plaster board type DF		

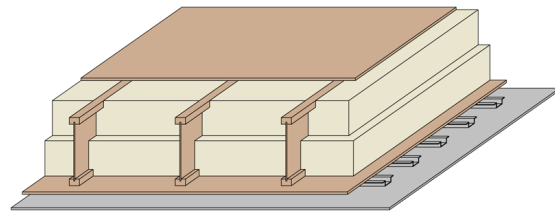

Note: gypsum plaster board type DF/ gypsum fibre board 2x12,5

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min - max}$	ρ	c	
A	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
B	400.0	Light composite wood-based beams (I-beams) with solid wood flanges (60/45) and hard board intermediate web ($\geq 6,7$)	0.400	20 - 30	800	1.700	D
C	400.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
D	15.0	OSB	0.130	200	600	1.700	D
E	27.0	metal rail					
F	25.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2
F	25.0	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

O13_{Kon} 29.0

Calculated using gypsum plaster board type DF
 Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.138	0.061	2,31E-6	0.018	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	80.766	607.431	688.197	437.906	30.435	468.340