

Floor towards attic (uninhabitable) - ddrxxa01a-04

floor towards attic (uninhabitable), timber frame construction, suspended, dry, other surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi}$ = 3,5 kN/m²
 Classified by HFA

Germany

F30 (from below/ from above)

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.12, Zeile 1 in conjunction with 10.7.5 (to attic no floating screed necessary)

Thermal performance U 0.19 W/(m²K)
 Diffusion suitable



Calculated by TUM

Acoustic performance R_w (C;C_{tr}) 43(-3;-11) dB
 $L_{n,w}$ (C_i) 75(0)

Assessed by Müller-BBM

Mass per unit area m 44.10 kg/m²

Calculation based on gypsum plaster board type DF

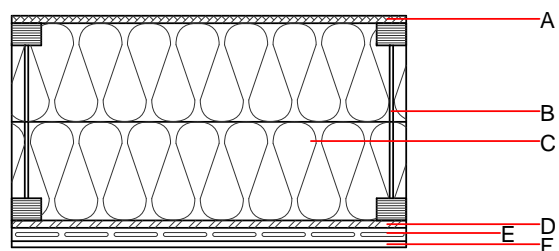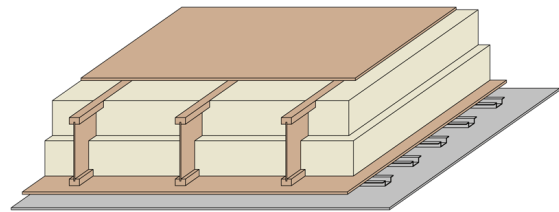

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire	
			λ	μ min – max	ρ	c	EN	
A	16.0	fibreboard (MDF)	0.140	11	600	1.700	D	
B	220.0	construction timber	0.120	50	450	1.600	D	
C	220.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1	
D	15.0	OSB	0.130	200	600	1.700	D	
E	27.0	metal rail						
F	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2	
F	12.5	gypsum fibre board	0.320	21	1000	1.100	A2	

Sustainability rating (per m²)

Database ecoinvent

OI3_{Kon} 23.0

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	34.680
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	50.200
Energy use of Primary Energy	MJ	621.820
Share of renewable PE	%	25.34

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.106	0.047	1,70E-6	0.018	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	82.025	476.411	558.436	357.705	30.095	387.800

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.118	0.019	1,68E-6	0.024	
C1 - C4		0.002	0.002	7,51E-8	0.000	
A1 - C4		0.122	0.022	1,76E-6	0.025	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	156.465	583.923	741.835	448.276	32.818	481.230
C1 - C4	0.709	-578.440	-577.732	9.648	-22.466	-12.818
A1 - C4	157.561	5.742	164.749	464.261	10.404	474.800