
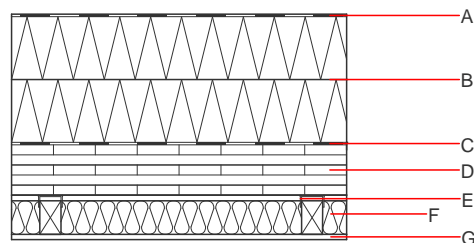


Flat roof - fdmobi01a-00

flat roof, solid wood construction, not ventilated, with dry lining, suspended, other surface

Performance rating

Fire protection performance	REI	60
maximum span = 5 m; maximum load $E_{d,fi} = 0,6 \text{ kN/m}^2$ Classified by HFA		
Thermal performance	U Diffusion	0.10 $\text{W}/(\text{m}^2\text{K})$ suitable
Calculated by HFA		
Acoustic performance	$R_w (C;C_{tr})$ $L_{n,w} (C_i)$	50 dB
Assessed by HFA		
Mass per unit area	m	118.10 kg/m^2
Calculation based on gypsum plaster board type DF		

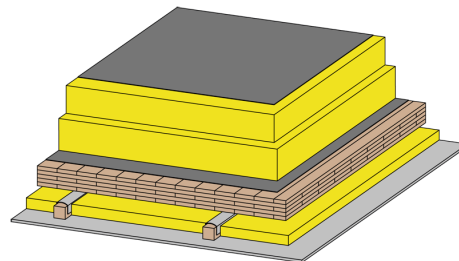

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A		Plastic roofing membrane					E
B	300.0	mineral wool [040; 130; $\geq 1000^\circ\text{C}$]; pressure-resistant	0.040	1	130	1.030	A1
C		sealing sheet					
D	125.0	cross laminated timber $\geq 125,0$; at least 5-layers, top layer at least 27,5 mm	0.130	50	500	1.600	D
E	80.0	spruce wood; battens on resilient clips (50/80; e=625)	0.120	50	450	1.600	D
F	80.0	mineral wool [040; 18]	0.040	1	18	1.030	A1
G	12.5	gypsum plaster board type DF / gypsum fibre board	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Database ecoinvent

O13_{Kon}	147.6
calculated with gypsum plaster fire protection board (GKF/DF); this data includes 3-, 5-, and 7-ply cross laminated timber elements; Calculated by HFA	

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.663	0.203	8,19E-6	0.255	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	81.388	907.410	988.798	1522.458	198.054	1720.511