

Flat roof - fdroba01a-00

flat roof, timber frame construction, not ventilated, with dry lining, suspended, other surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi} = 2,6 \text{ kN/m}^2$
 Classified by HFA

Germany

F30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.19, Zeile 1



Thermal performance U Diffusion 0.15 $\text{W}/(\text{m}^2\text{K})$ suitable

Attention: Due to the application of a moisture-adaptive vapour barrier an object-related proof according to protection against moisture (diffusion) is mandatory. A hygrothermic simulation is necessary (e.g. WUFI)
 Calculated by TUM

Acoustic performance $R_w (C;C_{tr})$ $L_{n,w} (C_i)$ 51(-4;-9) dB

Assessed by Müller-BBM

Mass per unit area m 156.70 kg/m^2

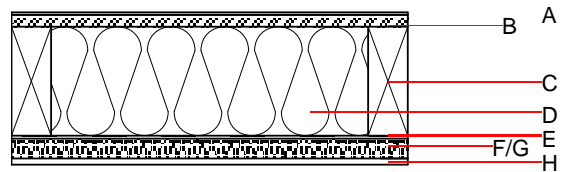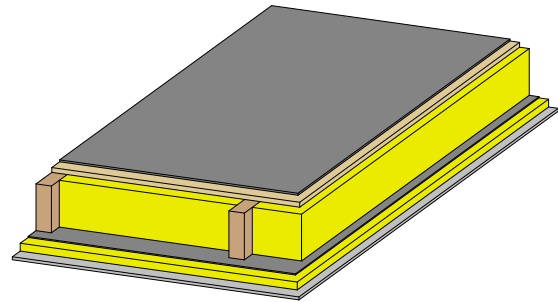

Note: ATTENTION: Regarding protection against moisture an object-related proof in terms of parameter like e.g. climate, shading class etc. is required. Therefore a hygrothermic simulation is necessary (e.g. WUFI), a simple Glaser calculation is not allowed.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min} - \text{max}$	ρ	c	
A		Plastic roofing membrane /metal sheeting on structured separation layer					E
B	25.0	OSB	0.130	200	600	1.700	D
C	240.0	construction timber (80/...; e=800)	0.120	50	450	1.600	D
D	240.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$]	0.040	1	30	1.030	A1
E		moisture-adaptive vapour retarder					E
F	40.0	acoustic hanger					
G	40.0	mineral wool [040; 30; $\geq 1000^\circ\text{C}$]	0.040	1	30	1.030	A1
H	15.0	gypsum plaster board type DF	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Databaseecoinvent

$OI3_{Kon}$ 40.7

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	32.900
Biogenic carbon in $\text{kg CO}_2\text{-e}$.	kg CO_2	48.940
Energy use of Primary Energy	MJ	761.390
Share of renewable PE	%	24.19

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.175	0.058	2,88E-6	0.058	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	91.212	440.726	531.937	485.759	88.127	573.885

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.152	0.022	1,18E-6	0.028	
C1 - C4		0.003	0.003	7,08E-8	0.000	
A1 - C4		0.157	0.026	1,26E-6	0.029	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	182.764	570.582	752.588	558.562	61.117	619.740
C1 - C4	0.952	-563.858	-562.908	10.624	-13.238	-2.614
A1 - C4	184.204	6.982	190.427	577.188	47.943	625.192