

### Flat roof - fdrobo01a-00

flat roof, timber frame construction, not ventilated, without dry lining, directly, wooden surface

#### Performance rating

**Fire protection performance** REI 60

maximum span = 5 m; maximum load  $E_{d,fi} = 2,6 \text{ kN/m}^2$   
 Classified by HFA



**Thermal performance** U 0.21  $\text{W}/(\text{m}^2\text{K})$   
**Diffusion**

Attention: Due to the application of a moisture-adaptive vapour barrier an object-related proof according to protection against moisture (diffusion) is mandatory. A hygrothermic simulation is necessary (e.g. WUFI)  
 Calculated by HFA

**Acoustic performance**  $R_w (C;C_{tr})$  37 dB  
 $L_{n,w} (C_i)$

Assessed by HFA

**Mass per unit area** m 39.90  $\text{kg}/\text{m}^2$

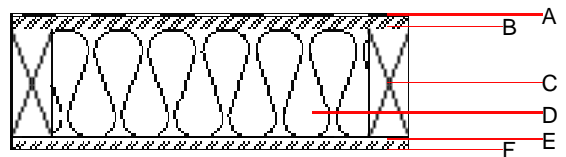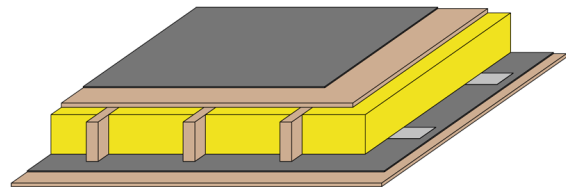

Note: ATTENTION: Regarding protection against moisture an object-related proof in terms of parameter like e.g. climate, shading class etc. is required. Therefore a hygrothermic simulation is necessary (e.g.WUFI), a simple Glaser calculation ist not allowed.

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A		Plastic roofing membrane					E
B	25.0	OSB	0.130	200	600	1.700	D
C	200.0	construction timber (80/...; e=800)	0.120	50	450	1.600	D
D	200.0	mineral wool [040; 33; $\geq 1000^\circ\text{C}$ ] with metal strip to retain the insulation in case of fire (0,63/100 mm; e=500)	0.040	1	33	1.030	A1
E		moisture-adaptive vapour retarder					E
F	18.0	OSB	0.130	200	600	1.700	D

#### Sustainability rating (per $\text{m}^2$ )

##### Database ecoinvent

$O13_{kon}$  32.6

Connection joint and screws are disregarded  
 Calculated by HFA

### Details of sustainability rating

#### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.147	0.048	2,56E-6	0.047	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	108.495	542.841	651.336	417.774	101.136	518.910