

## Flat roof - fdrobo02a-01

flat roof, timber frame construction, not ventilated, without dry lining, directly, other surface

### Performance rating

**Fire protection performance** REI 60

maximum span = 5 m; maximum load  $E_{d,fi} = 4,0 \text{ kN/m}^2$   
Classified by HFA



**Thermal performance** U 0.19  $\text{W/(m}^2\text{K)}$   
Diffusion

Attention: Due to the application of a moisture-adaptive vapour barrier an object-related proof according to protection against moisture (diffusion) is mandatory. A hygrothermic simulation is necessary (e.g. WUFI)  
Calculated by HFA

**Acoustic performance**  $R_w (C; C_{tr})$  34 dB  
 $L_{n,w} (C_i)$

Assessed by HFA

**Mass per unit area** m 54.30  $\text{kg/m}^2$

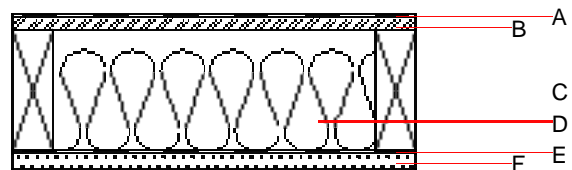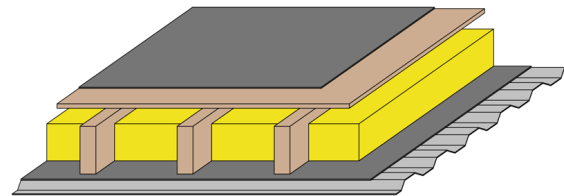

**Note: ATTENTION:** Regarding protection against moisture an object-related proof in terms of parameter like e.g. climate, shading class etc. is required. Therefore a hygrothermic simulation is necessary (e.g. WUFI), a simple Glaser calculation is not allowed.

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min - max}$	$\rho$	c	
A		Plastic roofing membrane					E
B	25.0	OSB	0.130	200	600	1.700	D
C	280.0	construction timber (80/280; e=625)	0.120	50	450	1.600	D
D	238.0	mineral wool [040; 33; $\geq 1000^\circ\text{C}$ ]	0.040	1	33	1.030	A1
E		moisture-adaptive vapour retarder					E
F	32.0	perforated trapezoidal metal sheet					E

### Sustainability rating (per $\text{m}^2$ )

#### Database ecoinvent

$OI3_{Kon}$  50.8

Connection joint and screws are disregarded  
Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.220	0.078	3,08E-6	0.070	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	103.368	464.310	567.678	581.000	88.127	669.127