

### Intermediate floor - gdrnxa03a-09

intermediate floor, timber frame construction, suspended, wet, with filling, other surface

#### Performance rating

**Fire protection performance** REI 30

maximum span = 5 m; maximum load  $E_{d,fi} = 2,62 \text{ kN/m}^2$   
 Classified by HFA



**Thermal performance** U Diffusion 0.25  $\text{W}/(\text{m}^2\text{K})$   
 suitable

Calculated by HFA

**Acoustic performance**  $R_w (C; C_{tr})$  64(-10;-19) dB  
 $L_{n,w} (C_i)$  57(6)

EPS-F with a dynamic stiffness of  $s' \leq 40\text{MN/m}^3$   
 Assessed by TGM

**Mass per unit area** m

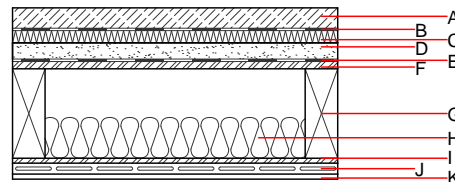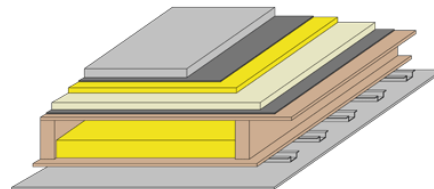

Note: e=625;

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	50.0	anhydrite screed or cement screed	0.700	10	2200	1.300	A1
B		plastic separation layer	0.200	100000	1400	1.400	E
C	30.0	Polystyrene EPS-W [0,041]	0.041	20 - 50	15	1.450	E
D	40.0	fill	0.700	1	1800	1.000	A1
E		trickling protection					E
F	18.0	OSB	0.130	200	600	1.700	D
G	220.0	construction timber (80/...; e=*)	0.120	50	450	1.600	D
H	100.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
I	12.0	OSB	0.130	200	600	1.700	D
J	27.0	resilient channel					
K	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
K	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

#### Sustainability rating (per $\text{m}^2$ )

##### Database ecoinvent

$O13_{kon}$  34.9

Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.140	0.065	2,32E-6	0.030	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	118.798	523.630	642.428	507.792	45.527	553.319