

## Intermediate floor - gdrnxa05b-07

intermediate floor, timber frame construction, suspended, wet, without filling, other surface

### Performance rating

**Fire protection performance** REI 60

maximum span = 5 m; maximum load  $E_{d,fi}$  = 3,66 kN/m<sup>2</sup> (without floor construction and 12mm OSB; with ceiling beam 80/200)

Classified by IBS

Classified by HFA



**Thermal performance** U Diffusion 0.26 W/(m<sup>2</sup>K)  
suitable

**Acoustic performance**  $R_w$  (C;C<sub>tr</sub>) 55(-2;-8) dB  
 $L_{n,w}$  (C<sub>i</sub>) 65(0)

Assessed by TGM

**Mass per unit area** m 169.40 kg/m<sup>2</sup>

Calculation based on gypsum plaster board type DF

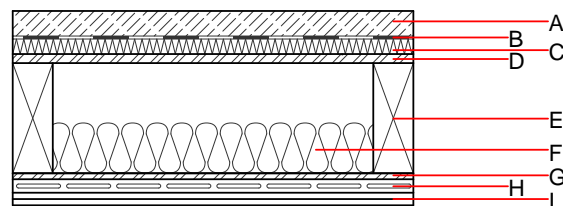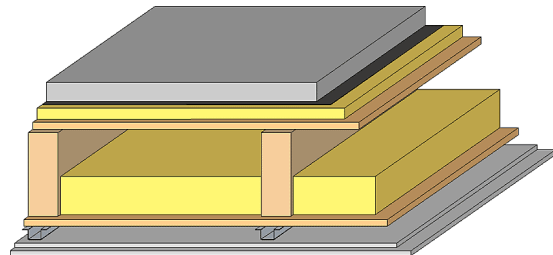

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min – max	$\rho$	c	
A	50.0	anhydrite screed or cement screed	0.700	10	2200	1.300	A1
B		plastic separation layer	0.200	100000	1400	1.400	E
C	30.0	impact sound absorbing subflooring EPS-T	0.040	20 - 50	11	1.450	E
D	18.0	OSB	0.130	200	600	1.700	D
E	220.0	construction timber (80/...; e=625)	0.120	50	450	1.600	D
F	100.0	mineral wool [040; ≥16; <1000°C]	0.040	1	16	1.030	A1
G	12.0	OSB	0.130	200	600	1.700	D
H	27.0	resilient channel					
I	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
I	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 35.7

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.140	0.066	2,54E-6	0.029	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	120.704	523.630	644.334	532.273	38.704	570.978