

Intermediate floor - gdrnxa07a-12

intermediate floor, timber frame construction, suspended, wet, with filling, other surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ (without floor construction; with ceiling beam 80/200)
 Classified by HFA
 Classified by HFA

Germany

F30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.12, Zeile 1

Thermal performance U Diffusion suitable



Calculated by HFA

Acoustic performance $R_w (C; C_{tr})$ 68(-1;-6) dB
 $L_{n,w} (C_i)$ 43(2)

Assessed by Müller-BBM

Mass per unit area m 197.70 kg/m²

Calculation based on gypsum plaster board type DF

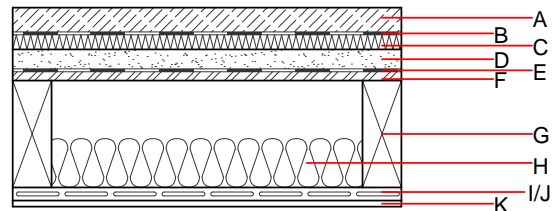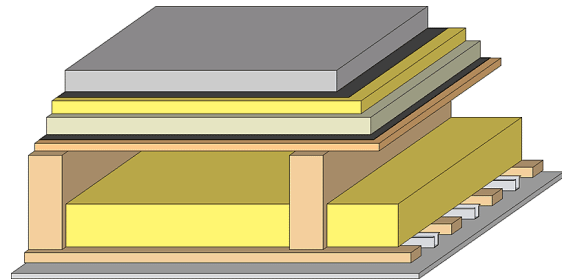

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min - max}$	ρ	c	
A	50.0	cement screed or anhydrite screed	1.330	50 - 100	2000	1.080	A1
B		plastic separation layer	0.200	100000	1400	1.400	E
C	40.0	impact sound absorbing subflooring MW-T [$s' = 10 \text{ MN/m}^3$]	0.035	1	68	1.030	A1
D	30.0	fill loose	0.700	1	1800	1.000	A1
E		trickling protection					E
F	18.0	OSB	0.130	200	600	1.700	D
G	220.0	construction timber (80/...; e=625)	0.120	50	450	1.600	D
H	100.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
I	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
J	27.0	resilient channel placed between cladding with spacing	0.156				
K	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
K	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

$OI3_{Kon}$ 39.5

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	32.390
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	48.080
Energy use of Primary Energy	MJ	877.880
Share of renewable PE	%	27.37

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.160	0.077	2,76E-6	0.029	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	114.418	527.058	641.477	568.510	27.408	595.918

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.149	0.024	8,27E-7	0.027	
C1 - C4		0.015	0.004	6,48E-8	0.002	
A1 - C4		0.168	0.029	8,99E-7	0.028	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	237.153	703.299	941.878	604.011	65.876	670.023
C1 - C4	2.716	-697.178	-693.323	28.158	-23.154	20.604
A1 - C4	240.250	6.379	249.679	637.628	42.774	704.279