
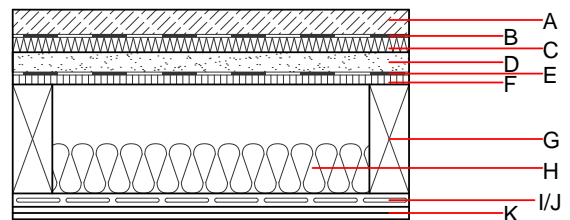


Intermediate floor - gdrnxa08b-02

intermediate floor, timber frame construction, suspended, wet, with filling, other surface

Performance rating

| | | |
|--|------------------|--------------------------------------|
| Fire protection performance | REI | 60 |
| maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ Classified by HFA | | |
| Thermal performance | U | 0.26 $\text{W}/(\text{m}^2\text{K})$ |
| | Diffusion | suitable |
| energy storage capacity per unit area above: 103,9 kg/m^2 Calculated by HFA | | |
| Acoustic performance | $R_w (C;C_{tr})$ | 71(0;-5) dB |
| | $L_{n,w} (C_i)$ | 40(1) |
| Mass per unit area | m | 227.30 kg/m^2 |
| Calculation based on gypsum plaster board type DF | | |

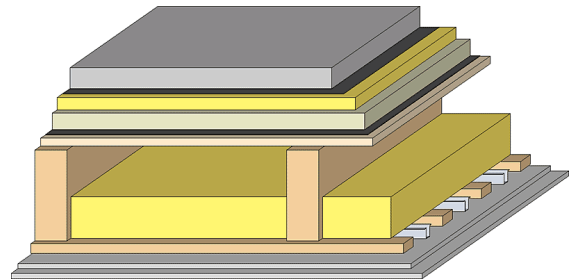

Note: e=625;

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

| | Thickness | Building material | Thermal performance | | | | Reaction to fire EN |
|---|-----------|---|---------------------|-----------------|--------|-------|------------------------|
| | | | λ | μ min - max | ρ | c | |
| A | 50.0 | cement screed or anhydrite screed | 1.330 | 50 - 100 | 2000 | 1.080 | A1 |
| B | | plastic separation layer | 0.200 | 100000 | 1400 | 1.400 | E |
| C | 30.0 | impact sound absorbing subflooring MW-T [$s' = 10 \text{ MN}/\text{m}^3$] | 0.035 | 1 | 68 | 1.030 | A1 |
| D | 40.0 | fill | 0.700 | 1 | 1800 | 1.000 | A1 |
| E | | trickling protection | | | | | E |
| F | 19.0 | particleboard | 0.130 | 50 - 100 | 700 | 1.700 | D |
| G | 240.0 | construction timber (80/...; e=*) | 0.120 | 50 | 450 | 1.600 | D |
| H | 100.0 | mineral wool [040; ≥ 16 ; $< 1000^\circ\text{C}$] | 0.040 | 1 | 16 | 1.030 | A1 |
| I | 24.0 | spruce wood cladding with spacing of cladding boards(24/100); a=400 | 0.120 | 50 | 450 | 1.600 | D |
| J | 27.0 | resilient channel placed between cladding with spacing | 0.156 | | | | |
| K | 25.0 | gypsum plaster board type DF (2x12,5 mm) or | 0.250 | 10 | 800 | 1.050 | A2 |
| K | 25.0 | gypsum fibre board (2x12,5 mm) | 0.320 | 21 | 1000 | 1.100 | A2 |

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{Kon}$ 43.5

Calculated by HFA

Details of sustainability rating

Database ecoinvent

| Lifecycle (Phases) | GWP [kg CO ₂ -e.] | AP [kg SO ₂ -e.] | EP [kg PO ₄ -e.] | ODP [kg R11-e.] | POCP [kg Ethen-e.] | |
|-----------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|-----------------------|--|
| A1 - A3 | | 0.165 | 0.080 | 2,93E-6 | 0.032 | |

| Lifecycle (Phases) | PERE [MJ] | PERM [MJ] | PERT [MJ] | PENRE [MJ] | PENRM [MJ] | PENRT [MJ] |
|-----------------------|--------------|--------------|--------------|---------------|---------------|---------------|
| A1 - A3 | 85.514 | 494.699 | 580.212 | 635.563 | 36.859 | 672.423 |