

Intermediate floor - gdrnxn04b-03

intermediate floor, timber frame construction, not suspended, wet, without filling, other surface

Performance rating

Fire protection performance	REI	60
maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ Classified by HFA		

Thermal performance	U Diffusion	0.25 W/(m ² K) suitable
----------------------------	----------------	---------------------------------------



Calculated by HFA

Acoustic performance	$R_w (C; C_{tr})$ $L_{n,w} (C_i)$	58(-5;-12) dB 63(0)
-----------------------------	--------------------------------------	------------------------

Assessed by TGM

Mass per unit area	m	157.00 kg/m ²
---------------------------	---	--------------------------

Calculation based on GF

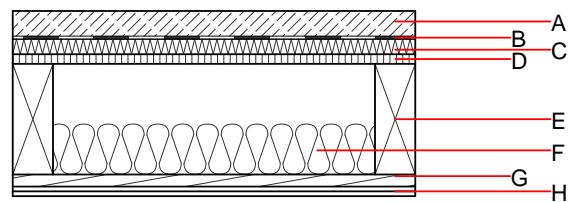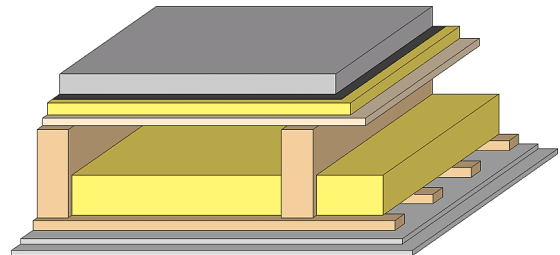

Note: e=625;

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	50.0	cement screed or anhydrite screed	1.330	50 - 100	2000	1.080	A1
B		plastic separation layer	0.200	100000	1400	1.400	E
C	30.0	impact sound absorbing subflooring MW-T	0.035	1	68	1.030	A1
D	19.0	particleboard	0.130	50 - 100	700	1.700	D
E	220.0	construction timber (80/...; e=*)	0.120	50	450	1.600	D
F	100.0	mineral wool [035; 50; <1000°C]	0.035	1	50	1.030	A1
G	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
H	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
H	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

013_{Kon} 49.4

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.187	0.090	3,42E-6	0.033	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	85.674	473.735	559.409	705.001	33.037	738.039