

Intermediate floor - gdrxa03a-09

intermediate floor, timber frame construction, suspended, dry, without filling, Gipsplatte

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$
 Classified by HFA

Thermal performance U 0.27 W/(m²K)
Diffusion suitable



Calculated by HFA

Acoustic performance $R_w (C;C_{tr})$ 60(-5;-12) dB
 $L_{n,w} (C_i)$ 60(1)

EPS-F with a dynamic stiffness of $s' \leq 40 \text{ MN/m}^3$.
 Assessed by TGM

Mass per unit area m 60.80 kg/m²

Calculation based on GF

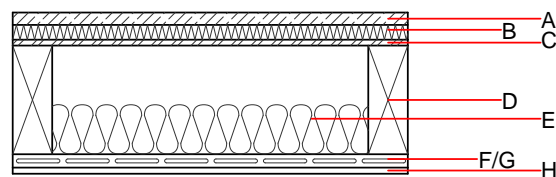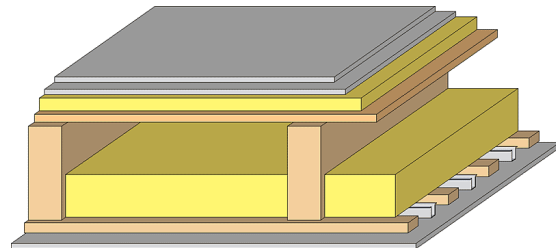

Note: e=625;

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	25.0	dry screed	0.210	8	900	1.050	A1
B	30.0	Polystyrene EPS-W [0,041]	0.041	20 - 50	15	1.450	E
C	18.0	OSB	0.130	200	600	1.700	D
D	220.0	construction timber (80/...; e=*)	0.120	50	450	1.600	D
E	100.0	mineral wool [040; ≥ 16 ; <1000°C]	0.040	1	16	1.030	A1
F	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
G	27.0	resilient channel (placed between open formwork)	0.156				
H	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
H	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

OI3_{Kon} 24.1

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.099	0.042	2,03E-6	0.022	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	87.322	406.419	493.741	381.264	33.032	414.296