

Intermediate floor - gdrtn04a-04

intermediate floor, timber frame construction, directly, dry, with filling, Gipsplatte

Performance rating

Fire protection performance REI 30

with planking 19 mm; maximum span = 5 m; maximum load $E_{d,fi} = 4,5 \text{ kN/m}^2$
 (without floor construction, with ceiling beam 80/220)
 Classified by HFA

Germany

F30

Load $E_{d,fi}$ according to the German certification document


Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.12, Zeile 1

Thermal performance U Diffusion suitable

Acoustic performance $R_w (C; C_{tr})$ 58(-6;-13) dB
 $L_{n,w} (C_i)$ 64(3)

Assessed by Müller-BBM

Mass per unit area m 121.50 kg/m²

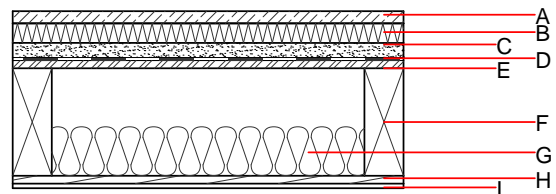

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	25.0	dry screed	0.210	8	900	1.050	A1
B	40.0	impact sound absorbing subflooring [040; $s' < 40 \text{ MN/m}^3$]	0.040	1	180	1.030	A1
C	30.0	fill (m' ca. 45 kg/m ³)	0.700	1	1800	1.000	A1
D	0.2	trickling protection					E
E	16.0	OSB	0.130	200	600	1.700	D
F	240.0	construction timber (80/...; e=625)	0.120	50	450	1.600	D
G	100.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
H	16.0	spruce wood tongue and groove planking	0.120	50	450	1.600	D
I	9.5	gypsum plaster board type A	0.250	4 - 10	680	1.050	A2

Sustainability rating (per m²)

Database ecoinvent

$OI3_{Kon}$ 24.4

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 38.180
Biogenic carbon in kg CO₂-e. kg CO₂ 55.410
Energy use of Primary Energy MJ 665.440
Share of renewable PE % 55.30

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.127	0.046	1,95E-6	0.039	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	114.674	595.354	710.028	374.903	16.350	391.253

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.107	0.017	9,12E-7	0.020	
C1 - C4		0.012	0.006	8,48E-8	0.001	
A1 - C4		0.120	0.024	1,00E-6	0.022	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	166.662	640.204	808.914	459.960	41.713	501.822
C1 - C4	2.939	-562.097	-559.159	31.000	-6.901	24.099
A1 - C4	169.916	78.366	250.330	495.522	34.853	530.524