

Pitched roof - sdmhbo01-02

pitched roof, solid wood construction, ventilated, without dry lining, without lining, wooden surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi}$ = 5 kN/m² (without roof structure)
Classified by HFA

Germany

REI30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: manufacturer-specific



Thermal performance U Diffusion 0.13 W/(m²K) suitable

Calculated by TUM

Acoustic performance R_w (C;C_{tr}) 48(-1;-6) dB
 $L_{n,w}$ (C_i)

Assessed by Müller-BBM

Mass per unit area m 136.30 kg/m²

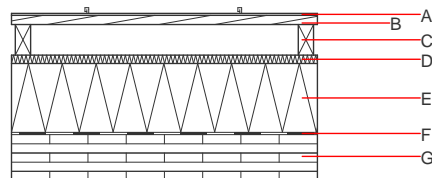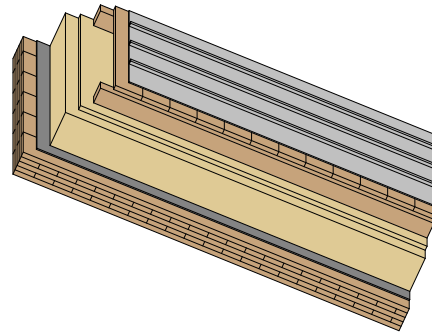

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A		sheet metal roofing on structured separation layer			7800		A1
B	24.0	spruce wood formwork	0.120	50	450	1.600	D
C	80.0	spruce wood counter battens (40/80)	0.120	50	450	1.600	D
D	22.0	softboard [045; 250] - rigid underlay	0.045	5	250	2.100	E
E	240.0	wood-fibre insulation board [0,040; R=200] on-roof insulation	0.040	5 - 7	200	2.100	E
F	0.2	sealing sheet (air tight)					
G	120.0	cross laminated timber	0.130	50	500	1.600	D

Sustainability rating (per m²)

Database ecoinvent

O13_{Kon} 73.5

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	145.520
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	203.890
Energy use of Primary Energy	MJ	1862.050
Share of renewable PE	%	35.63

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.354	0.158	6,11E-6	0.081	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	162.564	1857.963	2020.527	1233.852	102.343	1336.195

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.226	0.044	4,78E-6	0.048	
C1 - C4		0.002	0.000	2,10E-7	0.000	
A1 - C4		0.228	0.044	4,99E-6	0.049	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	661.188	2118.470	2778.668	1163.974	140.601	1303.903
C1 - C4	2.335	-2119.829	-2117.494	34.550	-64.449	-29.899
A1 - C4	663.523	-1.359	661.174	1198.524	76.152	1274.004