

Pitched roof - sdmhbo01-05

pitched roof, solid wood construction, ventilated, without dry lining, without lining, wooden surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi}$ = 5 kN/m² (without roof structure)
Classified by HFA

Germany

REI30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: manufacturer-specific



Thermal performance U Diffusion 0.14 W/(m²K) suitable

Calculated by TUM

Acoustic performance R_w (C ; C_{tr}) 41(-1;-6) dB
 $L_{n,w}$ (C_i)

Assessed by Müller-BBM

Mass per unit area m 119.50 kg/m²

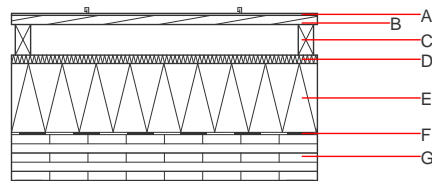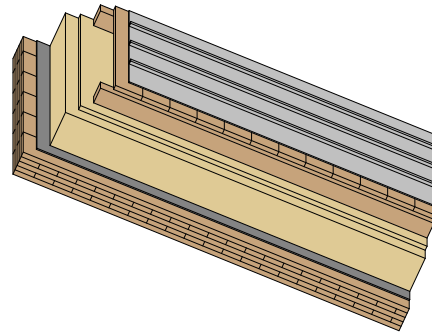

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Underlay laminated on insulation board

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A		sheet metal roofing on structured separation layer			7800		A1
B	24.0	spruce wood formwork	0.120	50	450	1.600	D
C	80.0	spruce wood counter battens (40/80)	0.120	50	450	1.600	D
D		sarking membrane $s_d \leq 0,3m$			1000		E
E	240.0	mineral wool [040; 130] on-roof insulation	0.040	1	130	1.030	
F	0.2	sealing sheet (air tight)					
G	120.0	cross laminated timber	0.130	50	500	1.600	D

Sustainability rating (per m²)

Database ecoinvent

O13_{Kon} 109.6

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	74.100
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	107.030
Energy use of Primary Energy	MJ	1417.980
Share of renewable PE	%	25.54

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.535	0.176	4,95E-6	0.204	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	96.707	1059.264	1155.970	1225.722	33.300	1259.022

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.381	0.055	4,54E-6	0.037	
C1 - C4		0.005	0.010	1,91E-7	0.001	
A1 - C4		0.387	0.065	4,73E-6	0.038	
Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	360.969	1266.650	1626.189	1030.890	126.134	1156.355
C1 - C4	1.144	-1261.300	-1260.156	23.586	0.000	23.586
A1 - C4	362.122	5.351	366.043	1055.861	126.134	1181.326